

HEAT RECOVERY VENTILATORS FOR RESIDENTIAL USE

MODEL

VL-100EU5-E

Wall switch type




Energy Saving

Reduced heat loss
contributes to lower air
conditioning costs.

Fresh Air

Simultaneous air
supply/exhaust function
ensures efficient ventilation.

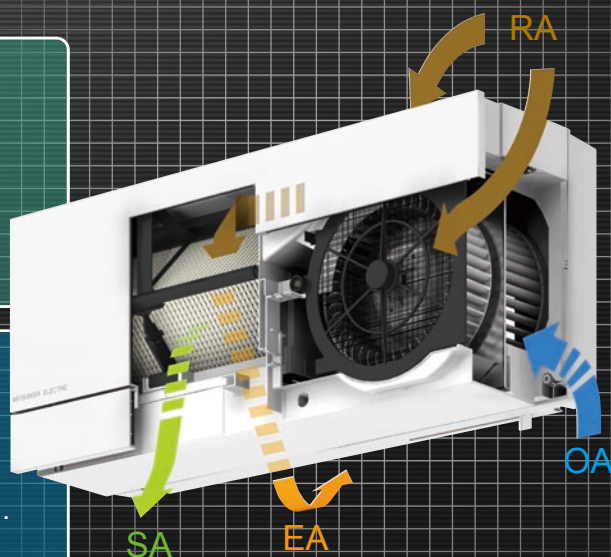

Quiet Operation

Equipped with sound
insulation for even
quieter operation.

Simple Installation

Easy installation
through boring of
2 installation holes.


Stylish Design

Designed to match
any interior decor.

Total-Heat-Exchange Concept



Operation in Winter

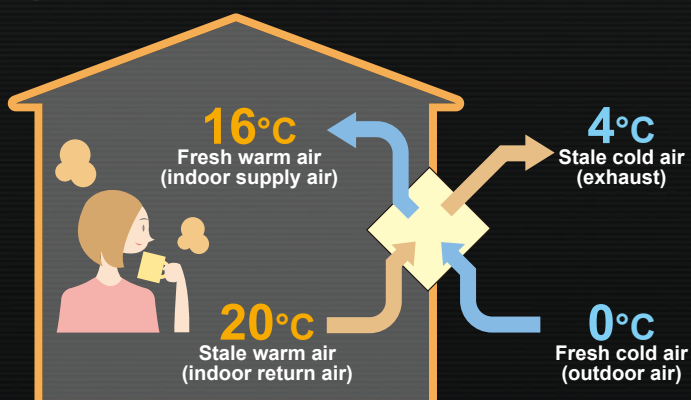


•Heat-exchange Temp. equation

$$\text{Indoor supply-air temperature (°C)} = \left\{ \text{Indoor temperature (°C)} - \text{Outdoor temperature (°C)} \right\} \times \text{Temp exchange efficiency (\%)} + \text{Outdoor temperature (°C)}$$

Calculation example : 16°C = (20°C - 0°C) × 80% + 0°C (Low fan speed)



Operation in Summer

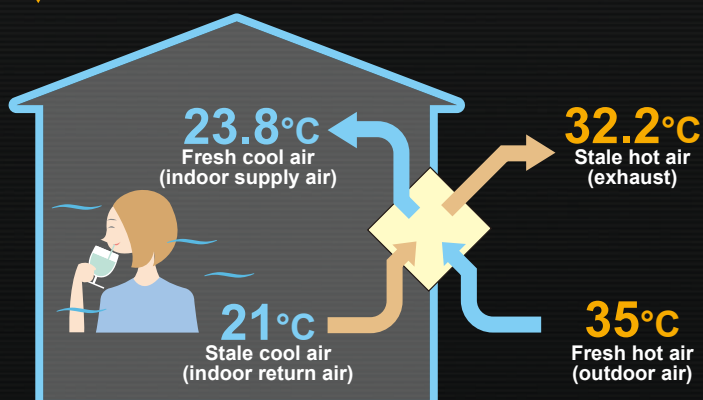

•Heat-exchange Temp. equation

$$\text{Indoor supply-air temperature (°C)} = \text{Outdoor temperature (°C)} - \left\{ \text{Outdoor temperature (°C)} - \text{Indoor temperature (°C)} \right\} \times \text{Temp exchange efficiency (\%)}$$

Calculation example : 23.8°C = 35°C - (35°C - 21°C) × 80% (Low fan speed)

Specifications

VL-100EU₅-E (White)





Supply voltage (V)	Power line frequency (Hz)	Fan speed	Air volume (m ³ /h)	Power consumption (W)	Temp.exchange efficiency (%)	Noise (dB)	Weight (kg)
220	50	HI	100	30	73	36.5	7.5
		LO	55	13	80	24	
230	50	HI	105	31	73	37	
		LO	60	15	80	25	
240	50	HI	106	34	72	38	
		LO	61	17	79	27	
220	60	HI	103	34	73	38	
		LO	57	17	80	25	

- Simple installation through boring of 2 installation holes.
- Low-noise (Less than 30dB at low fan speed).
- 1-motor 2-fan system.
- Air-volume: low/high fan speeds.
- Air-supply/exhaust pipes and a plastic weather cover are included.
- Equipped with an outdoor-air shutter.
- Wall switch

Dimensions

VL-100EU₅-E


MOUNTING PLATE

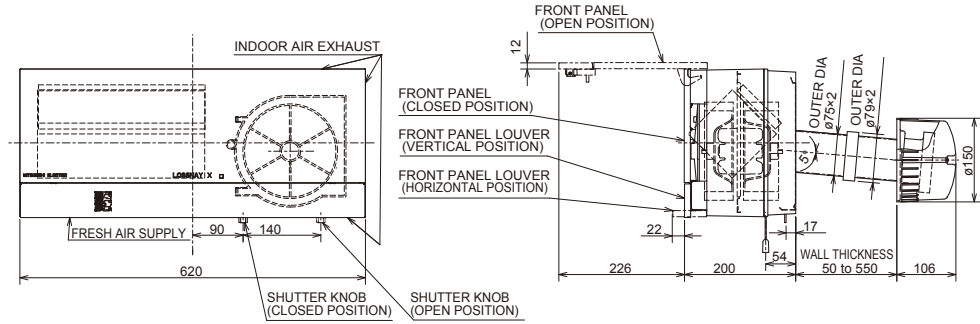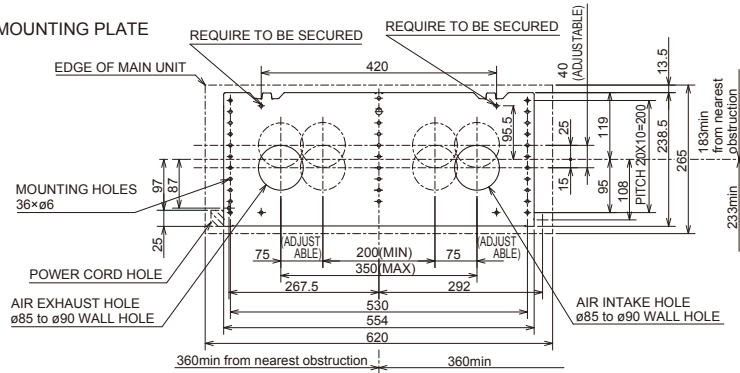

(unit: mm)


Wiring Diagram

VL-100EU₅-E

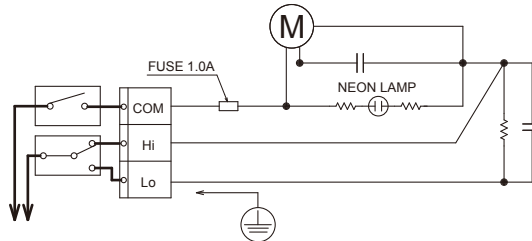


Optional parts

High performance filter P-100HF₅-E




- Upgraded high-performance filter.

Replacement filter P-100F₅-E




- Standard grade replacement filter.

Extension Pipe P-100P-E

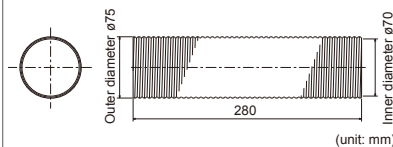

- Total length when connected to the pipe extension coupling is 300mm.

Extension Pipe Coupling P-100PJ-E



- Screw-in method

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
www.MitsubishiElectric.com