

Air-cooled Chilling Units



e-Series

Mitsubishi Electric offers the variation in 30 HP, 50 HP, and 60 HP of module which have teams up to meet customer's requirement.

Due to advancing global warming, there is a strong demand for central heat sources with higher performance. Mitsubishi Electric's modular chiller line-up contributes to realizing high functionality, reliability and energy saving with its own control.



Main Features

3 kinds of capacity module are available among 30 - 60 HP

- There are three capacity modules with the side flow type of 30 HP, the top flow type of 50, 60 HP.
- Up to 6 units of each module can be connected among 1 group, so capacity can be increased to up to 360 HP (60 HP × 6 units).

High energy saving performance

- Both EER and COP exceed 3.0, and energy saving operation is realized in both cooling and heating modes.
- A high efficiency scroll compressor is equipped with inverter, so optimum operation can be realized according to the load.

modular chiller line-up. various installation options

**Up to 6 units can be connected among 1 group.
The total capacity can be increased to
up to $60 \text{ HP} \times 6 \text{ units} = 360 \text{ HP}$**




**Use of Y-shaped structure
for sufficient intake air volume
(50/60 HP module)**

**This picture is 50, 60 HP model.*

Selectable piping system to save installation space and installation work


- Standard and built-in header types are available. The optimum piping system can be selected according to the design and construction needs.

Module line-up

	30HP 90kW module ^{*1}	50HP 150kW module	60HP 180kW module
			
Heat Pump	EAHV-P900YAL(-N)(-BS) EAHV-P900YAF(-N)(-BS)	EAHV-P1500YBL(-N)(-BS)	EAHV-P1800YBL(-N)(-BS)
Heating Only	EAHV-P900YAL-H(-N)(-BS) EAHV-P900YAF-H(-N)(-BS)	EAHV-P1500YBL-H(-N)(-BS)	EAHV-P1800YBL-H(-N)(-BS)
Cooling Only	EACV-P900YAL(-N)(-BS) EACV-P900YAF(-N)(-BS)	EACV-P1500YBL(-N)(-BS)	EACV-P1800YBL(-N)(-BS)

* (-N) indicates model with built-in header.

*1 The amount of pre-charged refrigerant differs among models. YAF indicates full refrigerant charging model.

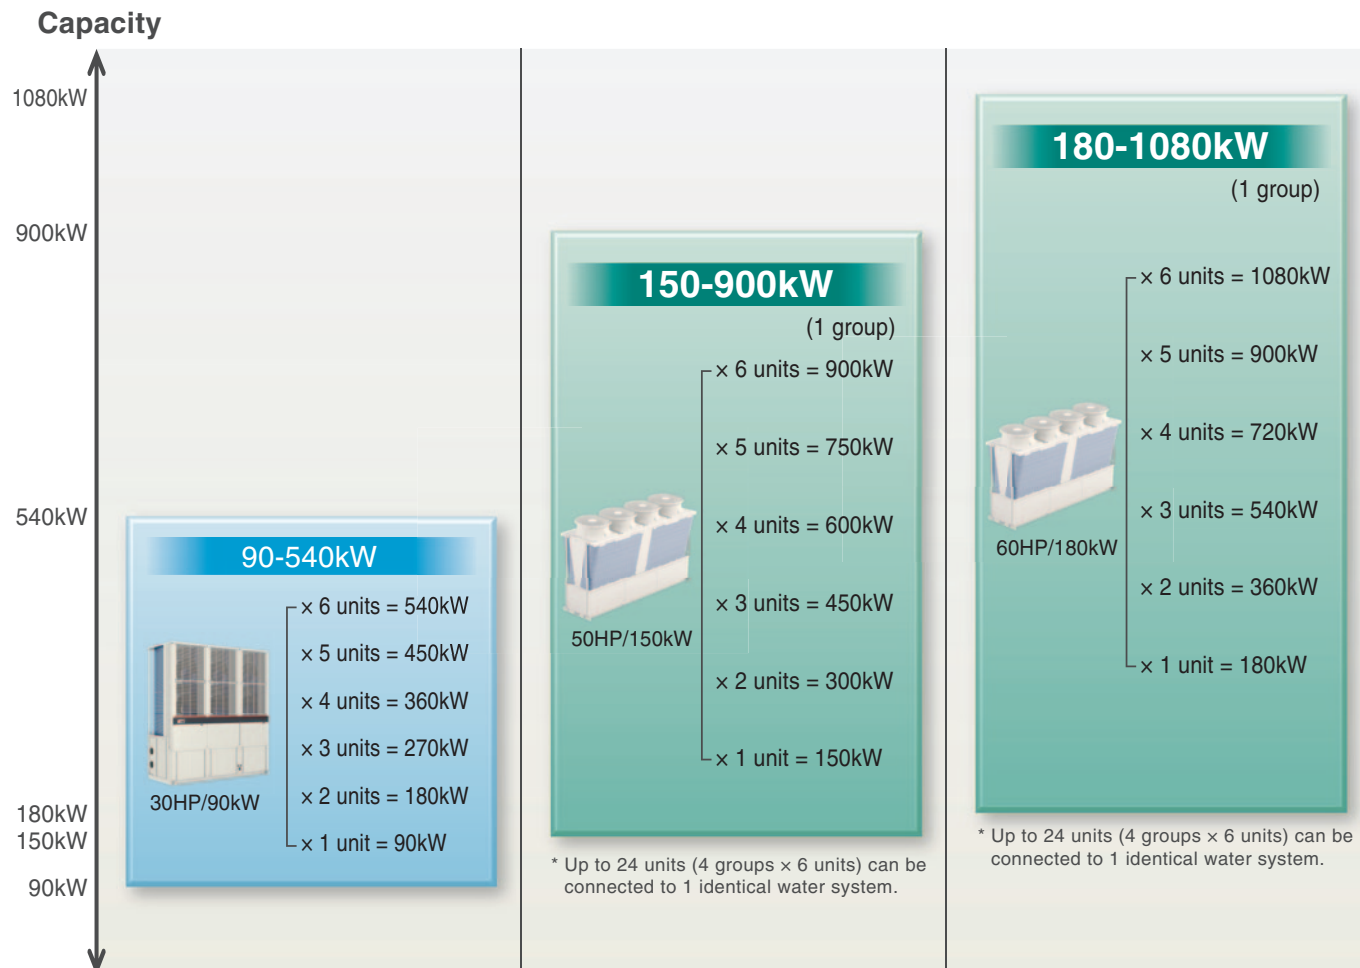

Remote controller

Individual Remote Controller



PAR-W31MAA

Centralized Remote Controller*

* Connectable to EAHV-P900YAL/F only



AE-200E/A



EW-50E/A


Option parts

Description	Image	P900	P1500/1800	Remarks
Piping Kit		EA-01HK	DT-01HK	for Inside Header type
Connection Piping Kit		EA-02HK	DT-02HK	for Inside Header type
Fin Guard		EA-130FG	—	for Standard Pipe type, Inside Header type *1
		—	DT-150FG	for Standard Pipe type, Inside Header type *2
Representative-water temperature sensor		TW-TH16-E		for Standard Pipe type, Inside Header type
Y type STRAINER 50A		YS-50A	—	for Standard Pipe type

*1 Only one piece of fin guard is included.
The necessary quantity is as follows.



*2 One set contains 4 fin guards.
Please refer to the following installation examples.



Modular Chiller P900


EAHV-P900YAL(-N)(-BS) EAHV-P900YAF(-N)(-BS)
EAHV-P900YAL-H(-N)(-BS) EAHV-P900YAF-H(-N)(-BS)
EACV-P900YAL(-N)(-BS) EACV-P900YAF(-N)(-BS)

Eurovent Certified



Mitsubishi Electric participates in the Eurovent Certification Programme for the chilling units. The certified models are listed in the Directory of Certified Products.

(Only heatpump and cooling model)

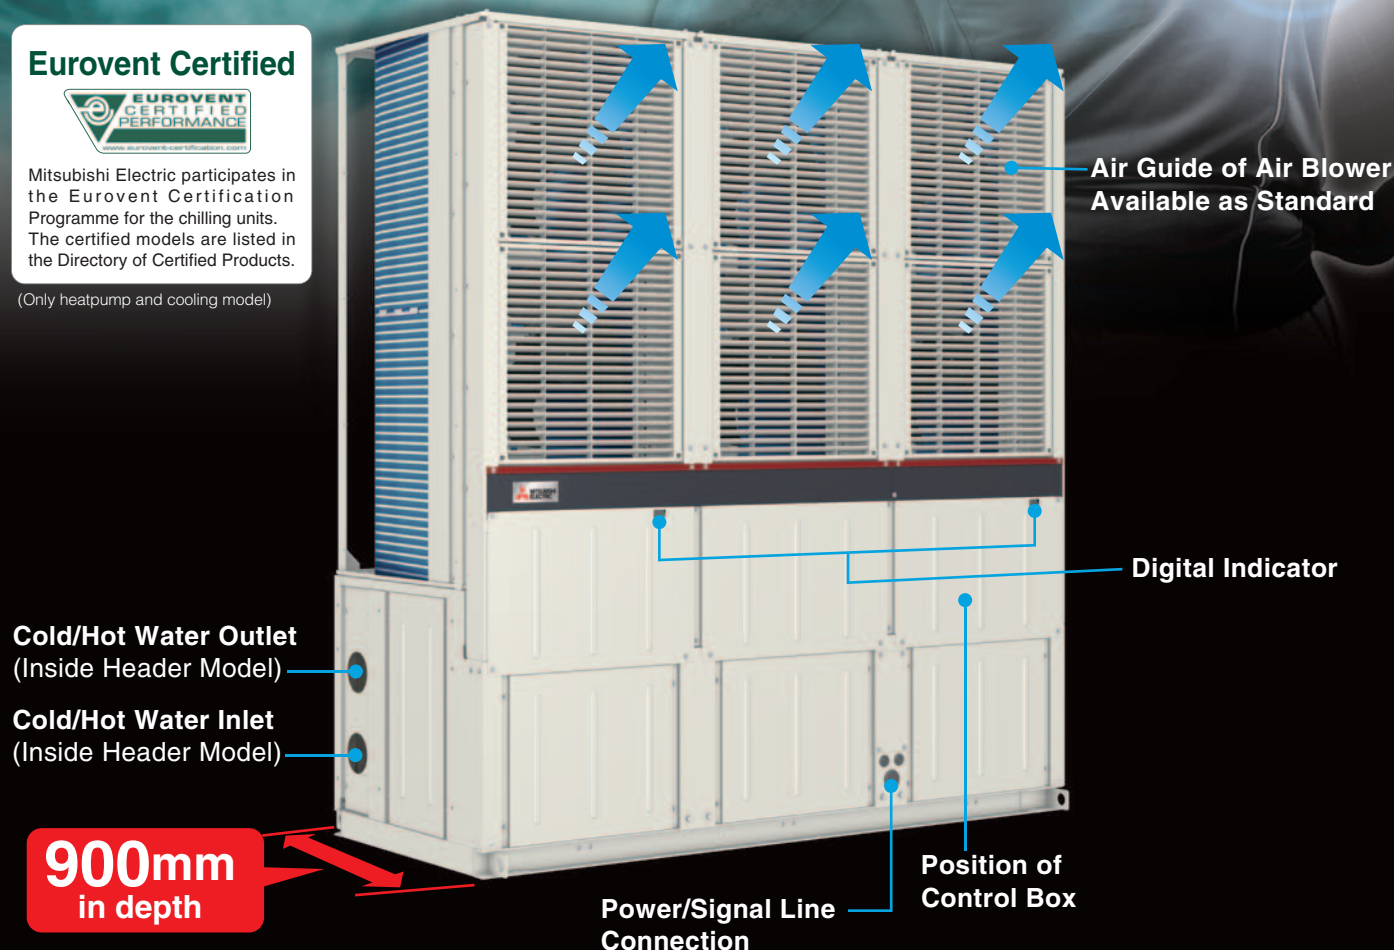

1 High energy saving performance by the use of inverter compressors

- Inverter compressor is automatically controlled according the load.
- Optimal control of fans by using inverters contributes to save energy.

2 High functionality of modular chiller

- Up to 6 modules can be connected.
- The combination control of modules helps to continue operation even when one module has stopped due to maintenance.

3 Saving space and installation work

- Small footprint installation helps to save space.
- Built-in header type is optional, external piping space can be reduced.

4 Easy system control

- Water temperature can be controlled remotely by using local remote controllers.
- By installing an AE-200E/A, it is possible to centrally control e-series and CITY MULTI at the same time.

5 Other feature

Brine usable

Ability to use brine allows for water supplies of as low as -10°C , suitable for use with process application cooling.

High energy saving performance by the use of inverter compressors

Each module is provided with two high-efficiency inverter scroll compressors developed by Mitsubishi Electric and can operate optimally according to the load. This improves the high energy saving performance.

Excellent Energy Saving Performance

High EER, High COP

EER 3.30

COP 3.50

- The air suction area is expanded to maximize the performance of the air heat exchanger.
- Two independent refrigerant circuits are provided in the module to cool and heat water in two stages in series to improve EER and COP.

* EER shows the value at an outdoor air temperature of 35°C and cool water inlet/outlet temperatures of 12°C/7°C, respectively.
COP shows the value at an outdoor air temperature of 7°C and hot water inlet/outlet temperatures of 40°C/45°C, respectively.
Pump input is not included.

High SEER


SEER 4.88

- Achieved the same SEER from 30 to 180 HP.

* SEER shows the value at an outdoor air temperature of 35°C and cool water inlet/outlet temperatures of 12°C/7°C, respectively.
Pump input is included based on EN14511.

Suppression of heating capacity drop at low outside temperatures

● e-series (EAHV-P900YAL/Fx3)

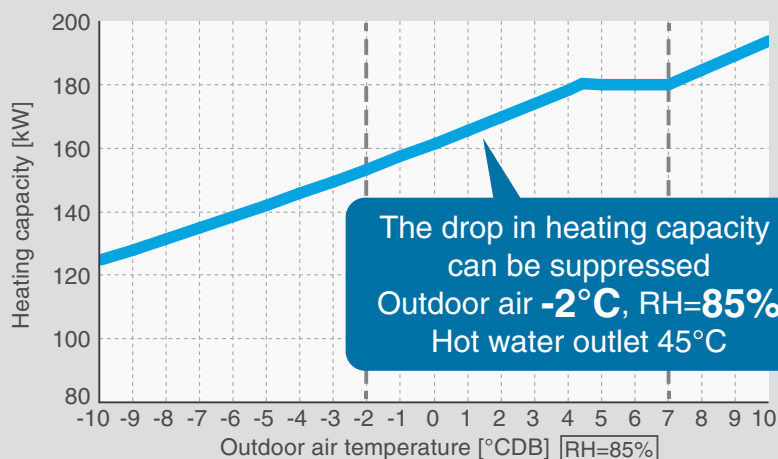


- A heat pump technology captures heat from the outdoor air. The heating performance decrease which occurs with a decrease in outdoor air temperature has been made up for by installing a larger number of units. This disadvantage has been eliminated with the e-series by increasing the heating performance in the low outdoor air temperature range. This allows the user to reduce the required number of units.


Large Temperature Difference Operation Significantly Increases Efficiency

Two Evaporation Temperature Refrigerating Cycles.

Two evaporators are connected to keep the evaporation temperature on the upstream side of cool water high.

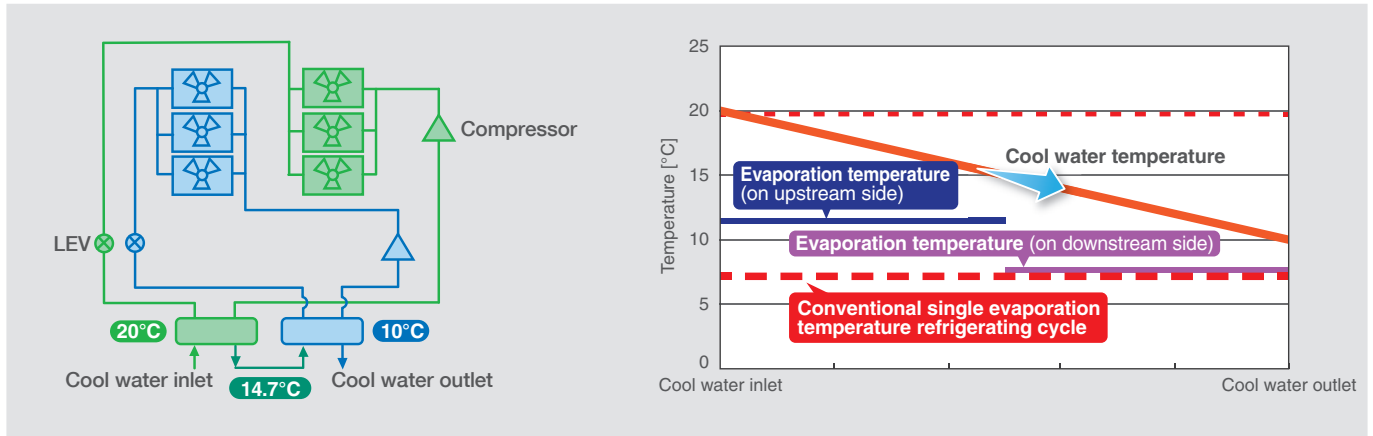

● Cool water outlet 10°C

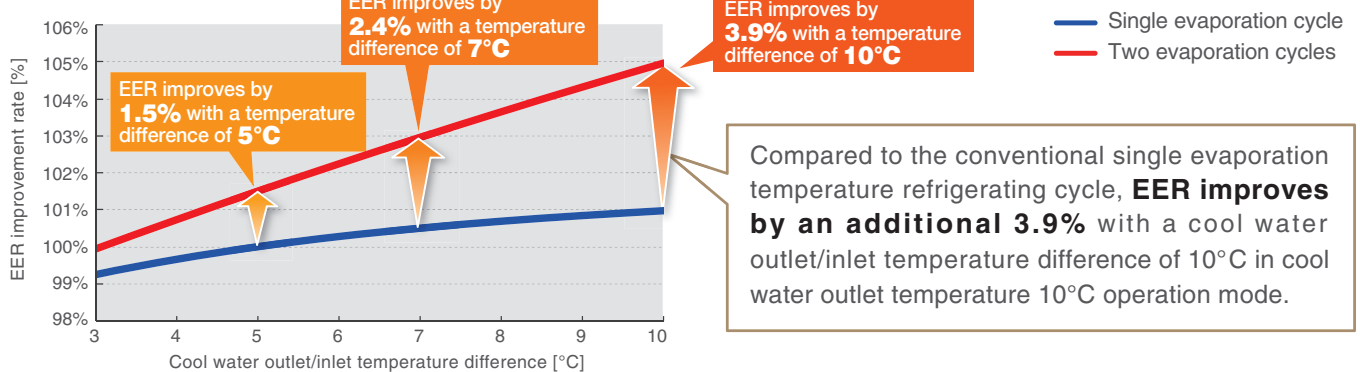

Energy-saving technology



High Efficiency Inverter Compressor

DC inverter scroll compressor is incorporated. Two compressors each are incorporated to increase efficiency.

Two refrigerating cycles


A configuration of two independent refrigerant circuits and the series connection of water-side heat exchangers increase the performance (two-stage cooling).

U-shaped High Performance Compact Air Heat Exchanger

U-shaped air heat exchangers are used. Installing them in a row makes the system thinner. Weather resistant coating is provided for the heat transfer plate fin as standard.

Inflexed Fan

Adoption of a fan with improved ventilation characteristics and a newly designed trailing edge that suppresses wind turbulence raises fan operation efficiency.

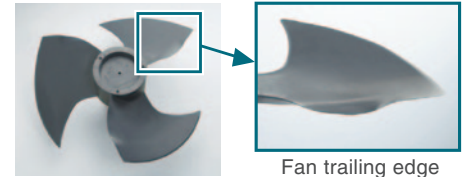


Fan Inverter Control

Air blower fans are also equipped with an inverter to save energy.

High functionality of modular chiller

Up to 6 modules can be connected


- The total capacity can be increased to up to 30HP × 6 modules = 180HP. Because modules can be installed horizontally in a row, installation in narrow places such as along building walls is possible.

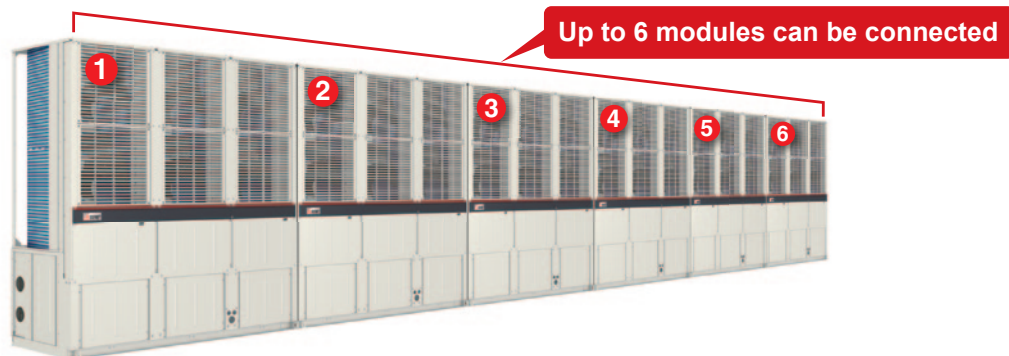

Combination control function


- The flexible backup operation among the combined modules enables the continuous operation, even one module is stopped due to maintenance.

Non-modular chiller

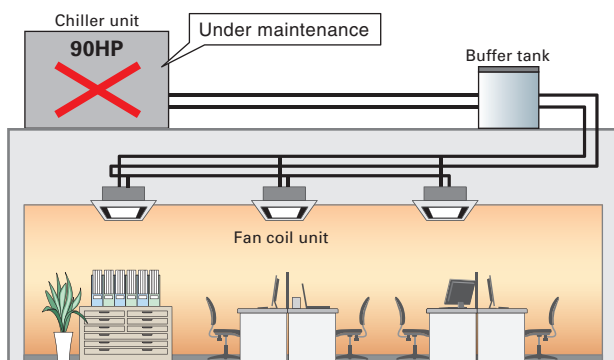

Since the chiller unit can not operate during maintenance, the timing of maintenance is limited.

Mitsubishi Electric modular chiller

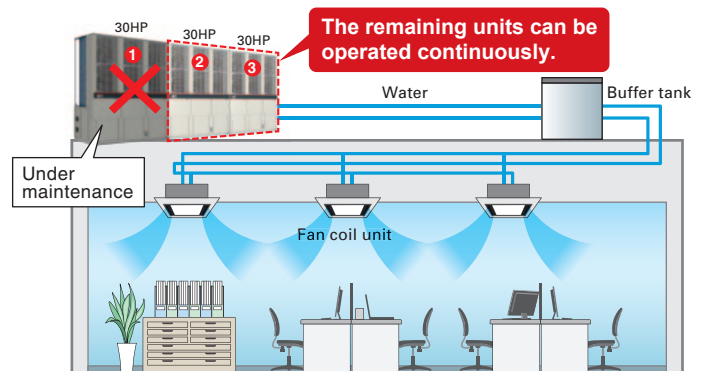

With our module chiller system, even if one module is stopped, the remaining modules back the continuous operation up.


* When performing maintenance, please confirm that the remaining modules meet the required capacity for the indoor side.

Saving space and installation work

Small Footprint Installation


Since this module has a compact and thin body, it is suitable for installation along the exterior walls of buildings or in narrow spaces, and it is possible to install the modules on each floor.

The depth of **900 mm** helps save space.

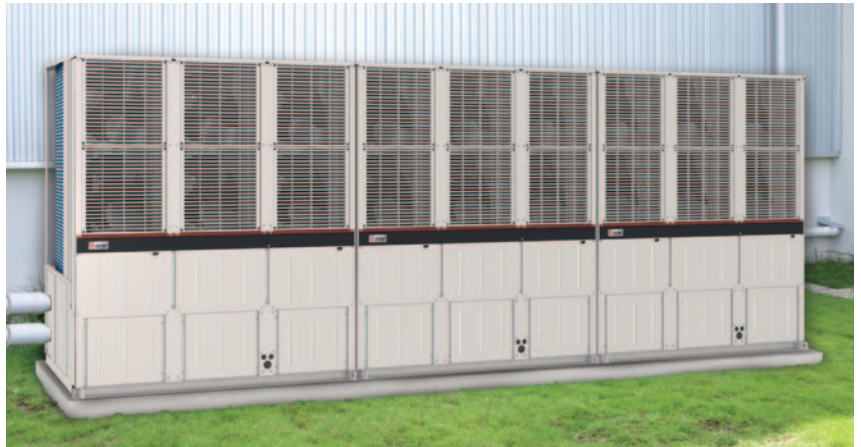


Installation example (single-row installation)

● Example of installation along the outer wall of a factory

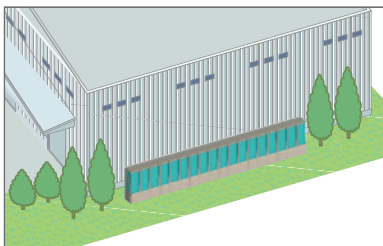

* For details on installation, refer to the installation manual.




- Installable in limited space, such as along the outer wall or in the corner of a factory, or in a narrow space of a building.
- The compact and thin design allows for the consideration of installation on each floor of a building, as is the case with industrial air conditioners.
(If the inside header specification is selected)
- The figure shows the air blowing surface directed toward the wall (a diagonal blowing air guide is equipped as standard). Directing the air blowing surface toward the wall is effective in preventing short cycling.

Installation example (others)



The modules can be installed in two rows or in one row on each of two stages using a frame. They can be installed flexibly according to the installation space.

● Front surface-facing double-row installation example

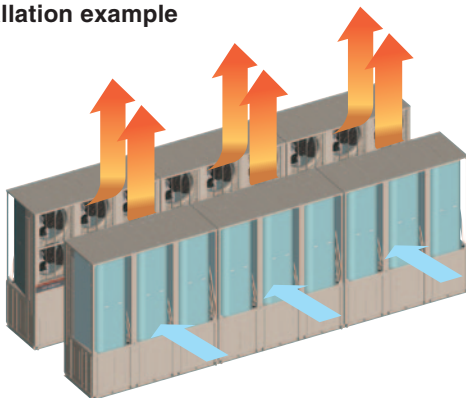

* For details on installation, please refer to the installation manual.

● Single-row double-stack installation example

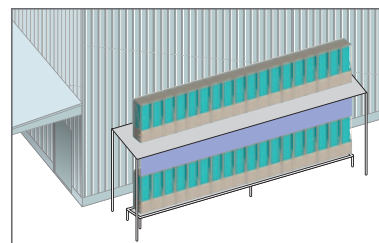

- The side-flow feature allows for a single-row double-stack installation by using a frame for the units installed in a row. Additional units can be installed above the units. If you plan to add units in the future, it is recommended to make a plan with consideration given to double-stack installation after the second phase of installation.
- The frame is to be supplied at the customer's site.
- The figure shows an example of using the inside header specification.

Inside Header

"-N" model only


Mitsubishi Electric's Unique Inside Header Incorporates Field Water Pipe Header into Module

- The field water pipe header section that is usually required to connect the module to the field water pipe is now available as a manufacturer option (hereinafter referred to as the "inside header") which can be incorporated into the module at the factory before shipment (a supplied connection kit is used for the connection work at the customer's site).
- This allows for incorporating the field water pipe header section into the module.
- In addition, the field connection work of the inside header is very simple. Significant simplification of the water pipe connection compared to the previous one has reduced the installation time.


Standard Pipe Specification

- The figure shows a 60 HP unit in which two 30 HP modules are connected.

A coupling to connect with the pipe supplied by the customer is to be supplied at the customer's site.

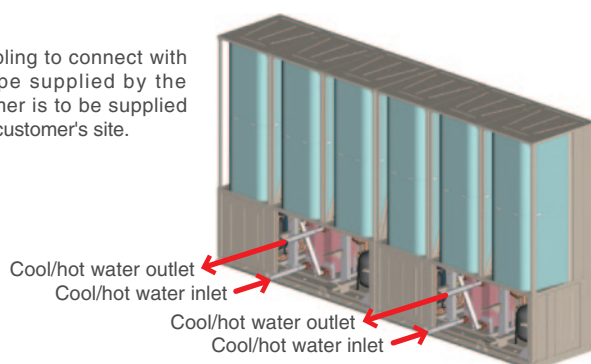

- Field water pipe header connection image *1
(In the case of installing one pump for one module)

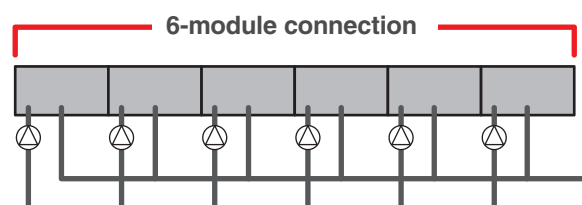

- Number of pumps: 6
- Pipes connected at the site: 12 points


*1 Be sure to install a strainer (optional parts: YS-50A) near the chiller on the inlet side of the cool/hot water pipe to prevent the entry of foreign substances such as dirt and sand particles to the plate heat exchanger.

➤➤➤ It is necessary to install connecting piping for installing a pump for each module.


Inside Header Specification (Left or right connection can be selected for the water pipes)

- The figure shows a 60 HP unit in which two 30 HP modules are connected.

Installation spacing of 10 mm between units is ensured by installing the units while contacting them with spacers.

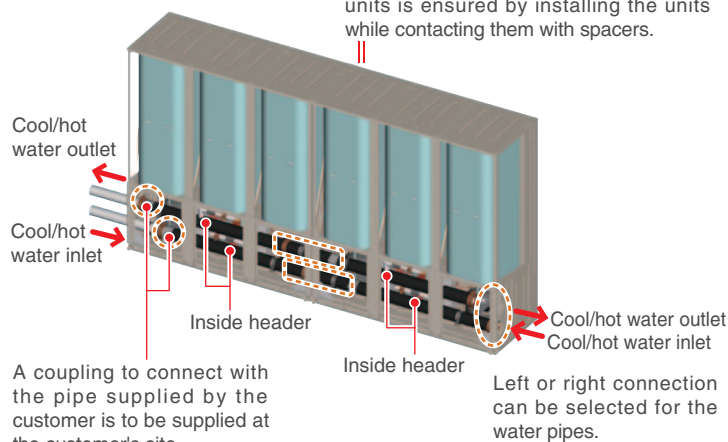

- Field water pipe header connection image *1
(In the case of installing one pump for one unit)

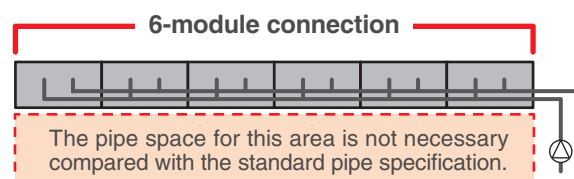

- Number of pumps: 1
- Pipes connected at the site:
2 points (10 internal connection points)

*1 Be sure to install a strainer near the chiller on the inlet side of the cool/hot water pipe to prevent the entry of foreign substances such as dirt and sand particles to the plate heat exchanger.

➤➤➤ ● Since the module contains a header, the external piping space can be reduced, and the on-site water piping work is simpler.*
● It is only necessary to install one pump, and the number of piping connections on site is reduced.


* On-site piping work using the connection piping kit (optional parts) is required. For more information, please refer to the following page.

Inside Header

"-N" model only


About Pipe Connection Kit

● This figure shows 540 HP (EAHV-P900YAL/F-N×6) as an example.

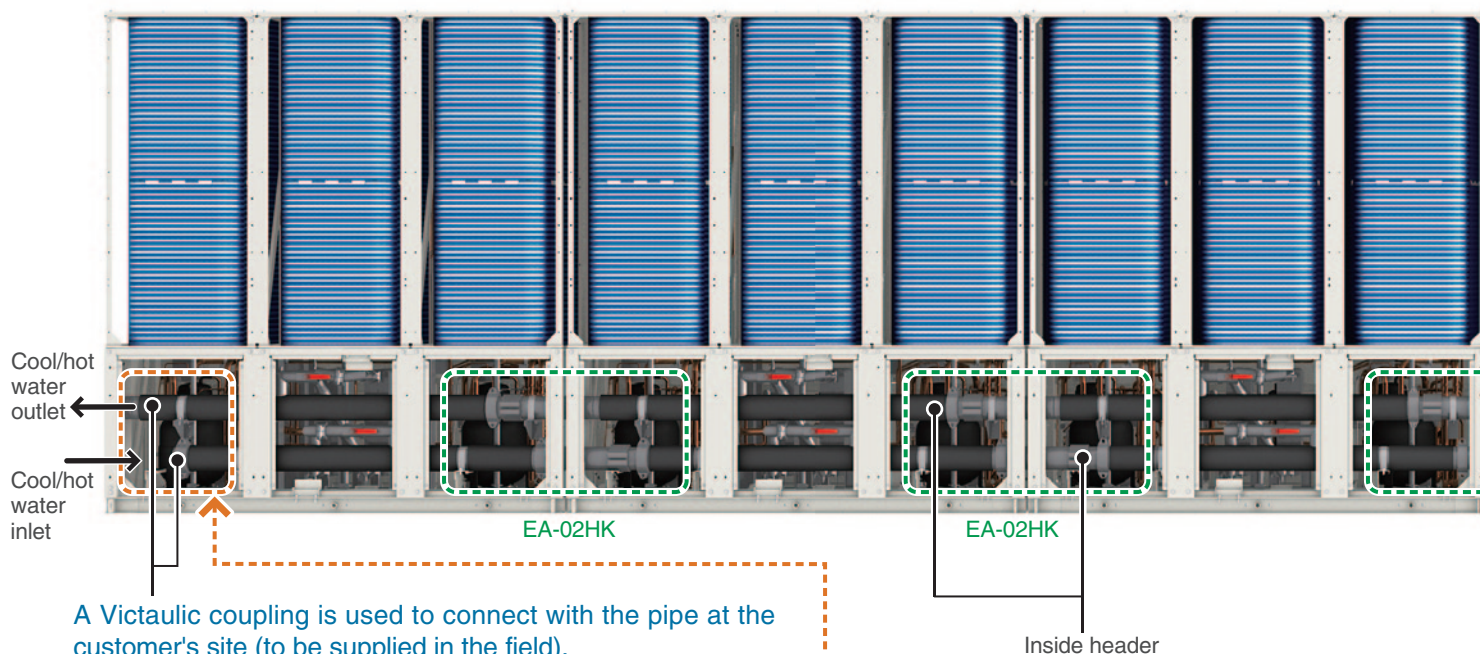


A Victaulic coupling is used to connect with the pipe at the customer's site (to be supplied in the field).


*Straub couplings and short pipes are included for the inside header specification.

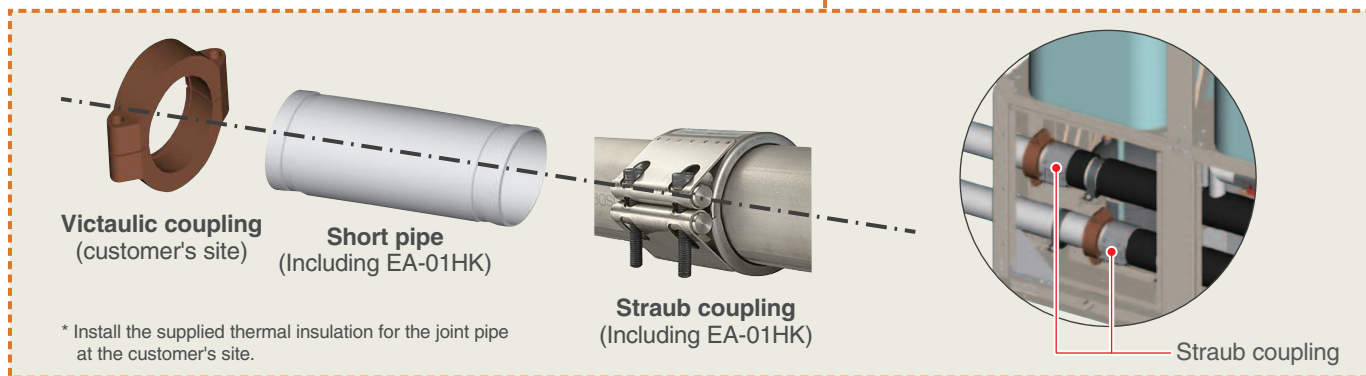


Structure

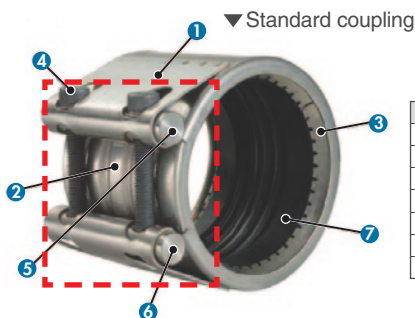

No.	Part name	Material
1	Casing	SUS 304
2	Sliding plate	SUS 301 or 304
3	Grip ring	SUS 301
4	Tightening bolt	SUS XM7
5	Rod washer	SUS 304
6	Rod nut	SUS 304
7	Rubber sleeve	EPDM




The sealed rubber has a lip structure to improve the water-stopping performance. Adjust the position of the Straub coupling so the marking on both sides can be seen.

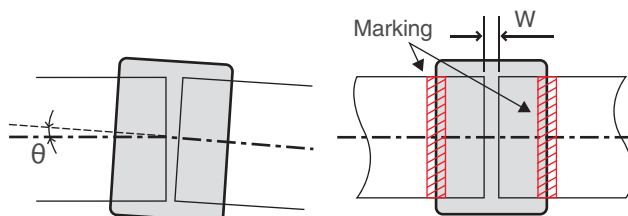


● Allowable clearance and tilt range

Allowable pipe clearance value [W]=0 to 25 mm




Allowable pipe tilt angle [θ]=±2°



Just tighten the bolt until the casing fits against (comes into contact with) the metal. Anyone can connect the pipes evenly and securely, regardless of their skills and the type of the pipe used.

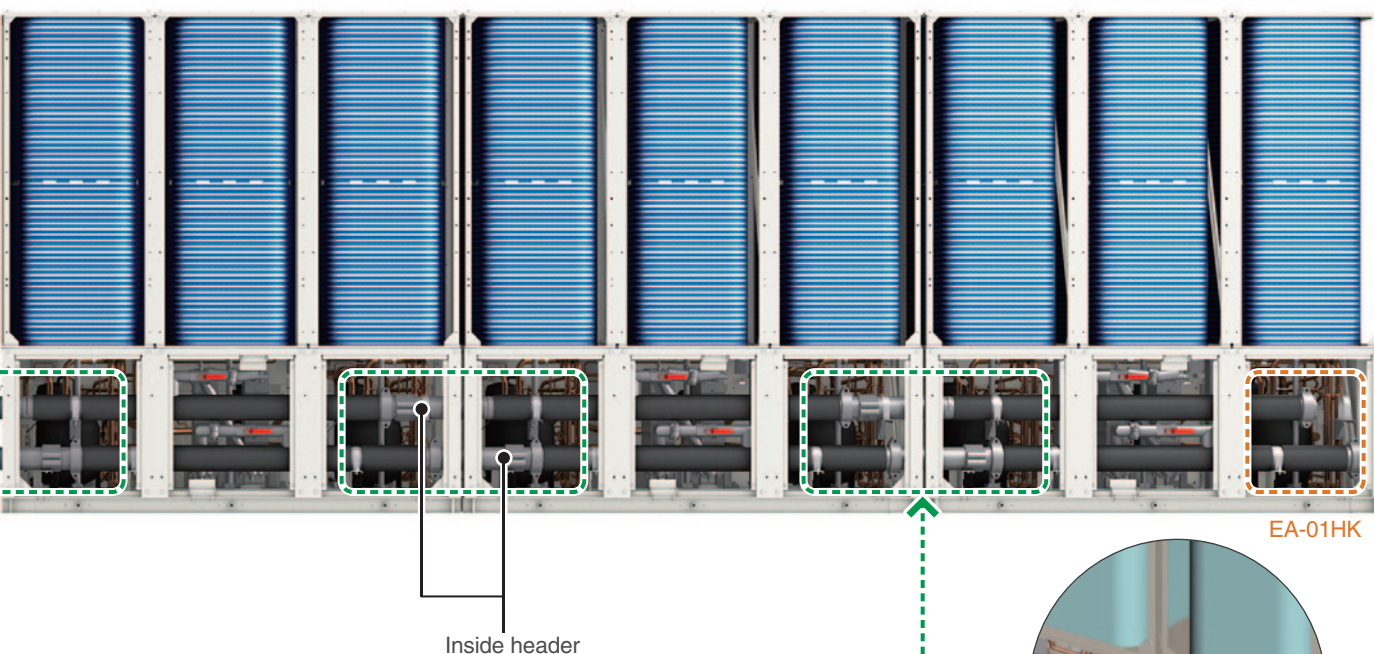


Connecting Pipe End (Connection at Customer's Site)

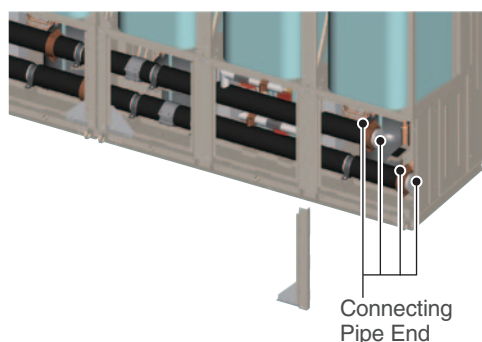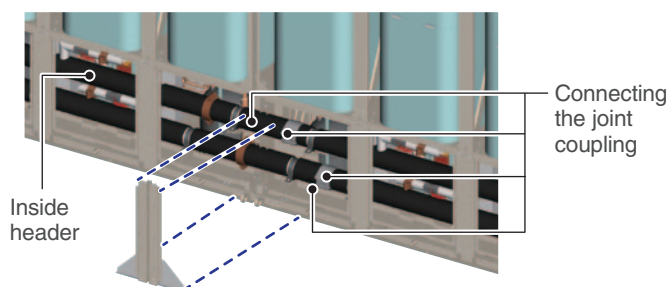

Victaulic coupling

Straub coupling


Optional parts① (Piping Kit) **EA-01HK**

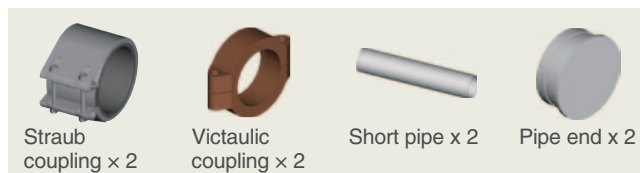

Optional parts② (Connection Piping Kit) **EA-02HK**



Capacity	Module (Inside header)	Optional parts ① EA-01HK (model)	Optional parts ② EA-02HK (model)
30 HP	1	1	0
60 HP (30 HP×2)	2	1	1
90 HP (30 HP×3)	3	1	2
120 HP (30 HP×4)	4	1	3
150 HP (30 HP×5)	5	1	4
180 HP (30 HP×6)	6	1	5

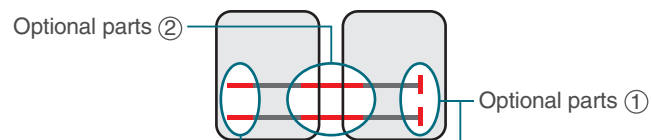


The Victaulic coupling and Straub coupling mentioned in the explanation are product names.

Easy system control


The water temperature in each module can be controlled by using local remote controllers or by using centralized controller “AE-200E/A”. The control method can be selected at the request of customer.

Remote control connection

- Up to 6 modules and one unit can be connected for each remote control.
- Simultaneous control.

Unit Remote Control	 PAR-W31MAA
Control	Simultaneous control
Number of modules that can be connected	6
Number of units that can be connected	1
Number of supported water lines	1
ON/OFF	○
Cooling/heating switch	○
FAN operation switch for snowfall	○
Target outlet temperature setting	○
Scheduled operation	○
Individual error display	○
Outlet water temperature setting of 5°C or below (Brine)	○

System configuration

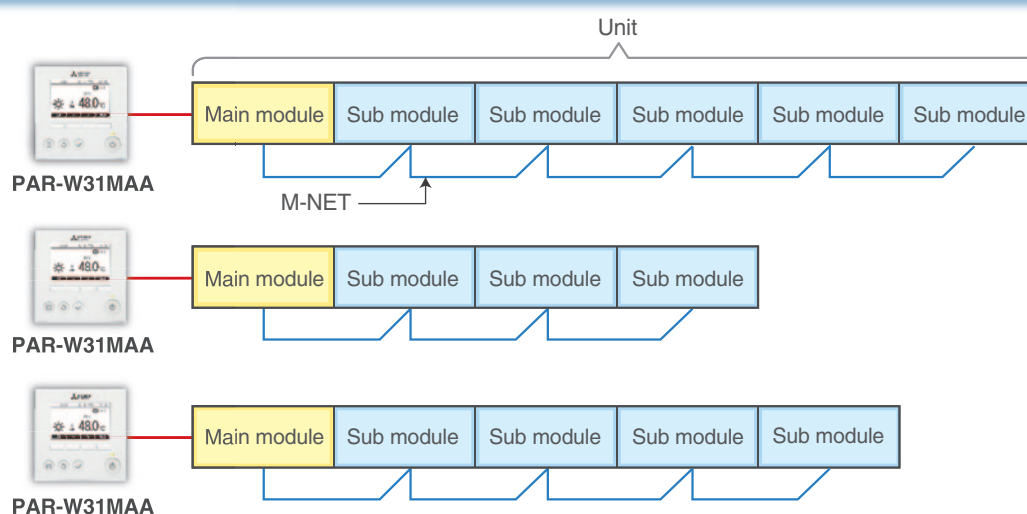

Demand control

Forced capacity control up to the demand upper limit by an external input to the unit (non-voltage normal open). Heating demand is possible in addition to the cooling demand.

Centralized controller*

When connected to the AE-200E/A centralized controller or the EW-50A/E expansion controller, up to 6 e-series modules can be connected to 1 group for centralized monitoring and management.


Combined management of CITY MULTI is also possible.

* Centralized monitoring and management are possible only for M-NET-connected e-series units.

* EACV (P900, P1500, P1800) and EAHV (P1500, P1800) models cannot be connected.




System configuration

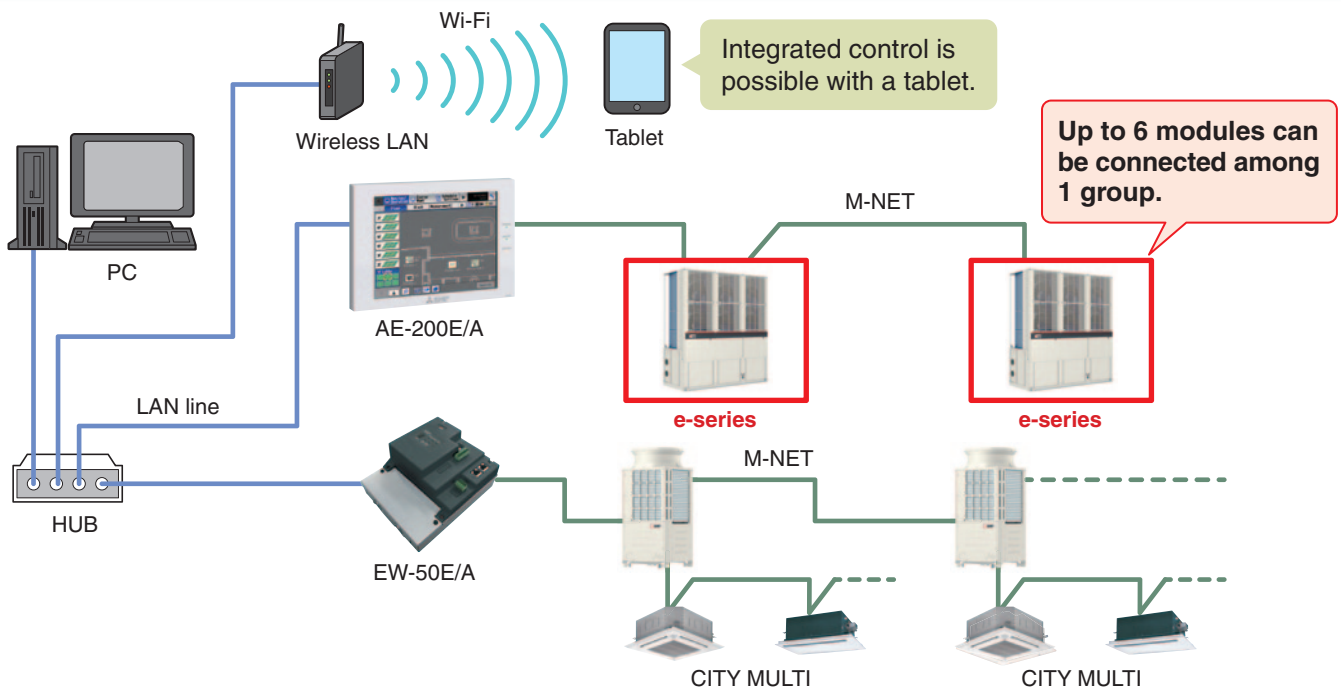


Monitoring on LCD touch panel and web browser

Monitoring of the operating condition—including the water temperature—of e-series units are possible from the LCD screen of the AE-200E/A or from a Web browser.

● LCD

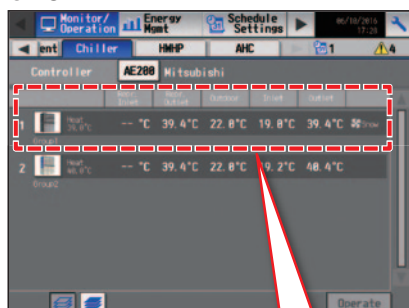

● Integrated Centralized Control web

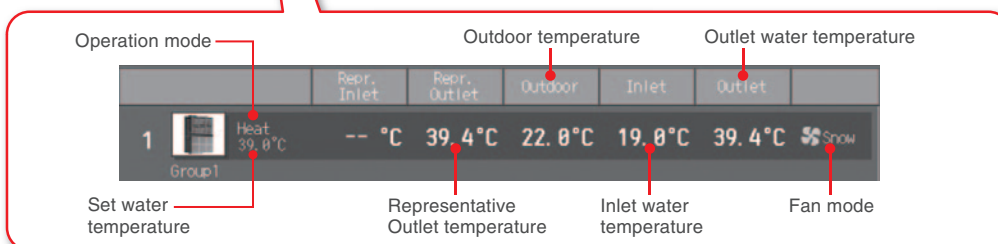


The EACV-P900YAL/F(-N) model is suitable for versatile use, including process cooling.


*P1500/P1800 is not usable

- The EACV-P900YAL/F(-N) model supports a wider outlet water temperature setting range (between 5°C and -10°C) and is suitable for use for a variety of applications. The use of inverter controlled fan and compressor enables precise control of outlet water temperature, which is essential in process cooling. This model is also suitable for use at metal and food factories and for use to cool testing equipment at hospitals.

Inverter controlled fan and compressor enables precise control of outlet temperatures on air-cooled unit.

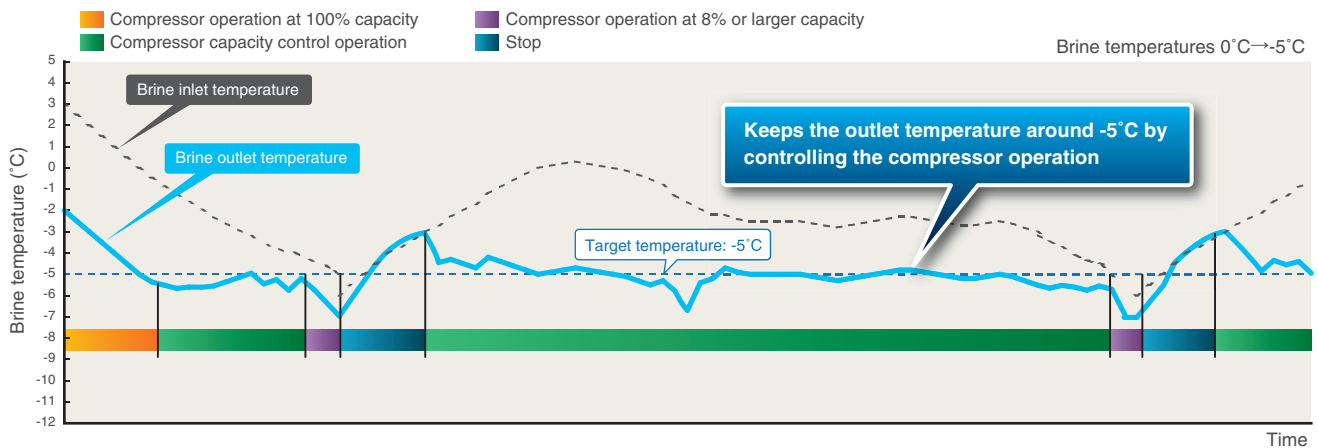

Application examples

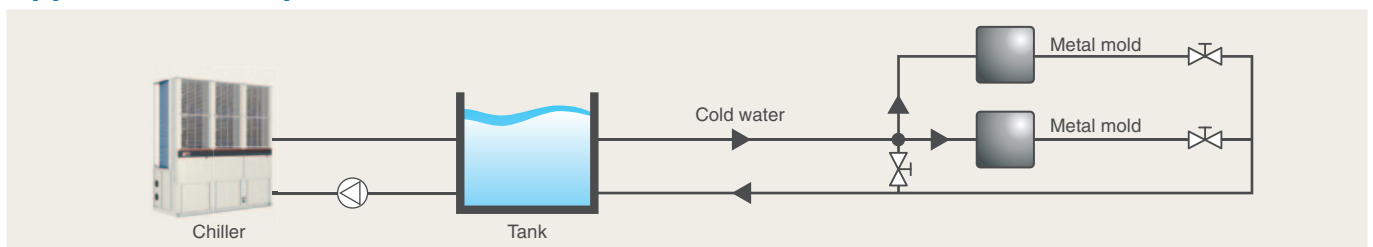


Manufacturing industries

Temperatures of metal for molding plastic products such as housings of electric products going out of range even in a single circuit shuts down the entire system, and its recovery takes time. This model helps boost productivity by ensuring stable temperature control.

Food industries

Bread factories, beer brewery factories, and wholesale fish markets

What is brine?

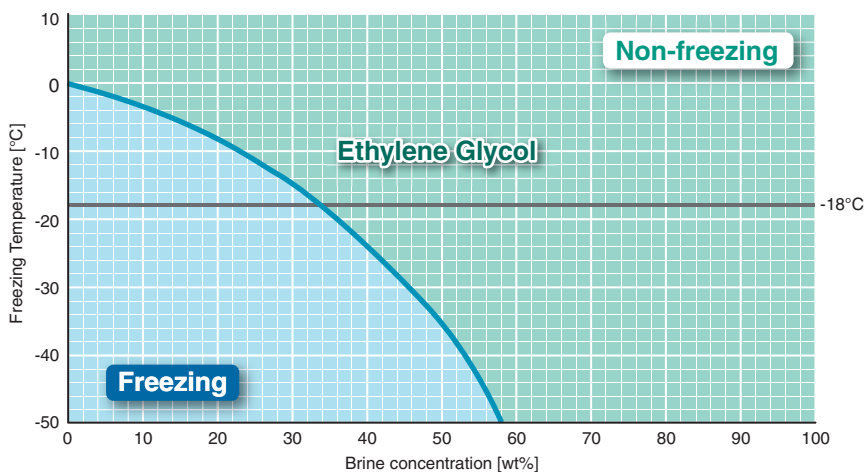

Brine is a mixture of water and antifreeze solution that brings the freezing point down to prevent freezing at subzero temperatures. The freezing point depends on the percentage of antifreeze, whose main component is ethylene glycol. This model is available with the outlet water temperature setting range down to -10°C.

Note;
The graph was referred from chemical company data. But Freezing Temperature condition will be slightly different based on each company.
Please confirm detail data to the chemical company directly.
The brine concentration should be set a percentage that keeps the freezing temperature at -18°C or less to prevent the freezing.




Specifications (Cooling only model)

Model				EACV-P900YAL(-N)(-BS) EACV-P900YAF(-N)(-BS)		
Power source				3-phase 4-wire 380-400-415V 50/60Hz		
Capacity change mode				Capacity priority	COP priority	
Cooling capacity *1 Water			kW	90.00	63.00	
			kcal/h	77,400	54,180	
			BTU/h	307,080	214,956	
			kW	27.27	16.27	
			A	46.0 - 43.7 - 42.2	27.5 - 26.1 - 25.2	
		Pump input is not included	Power input *2		3.30	3.87
			Current input 380-400-415V		5.66	—
		Certified value by EUROVENT	EER		3.08	3.76
			ESEER		4.71	—
			ESEER *3 *4		5.46	—
ESEER (Includes pump input based on EN14511) *3 *5			4.88	—		
SEER (Includes pump input based on EN14511) *3			6.34	—		
IPLV *6	kW/kW		15.5	10.8		
		Water flow rate		kW	56.73	
				kcal/h	48,788	
				BTU/h	193,563	
					134,228	
Cooling capacity *7 *8 Brine(ethylene glycol 35wt%)		Power input *2	kW	25.98	15.78	
		Current input 380-400-415V	A	43.9 - 41.7 - 40.2	26.7 - 25.4 - 24.4	
		EER(Pump input is not included)			2.18	2.49
		EER(Includes pump input based on EN14511) *3			2.10	2.42
		Brine flow rate		m³/h	11.5	8.0
Maximum current input			A	61		
Water pressure drop		Water *9	kPa	135	65	
		Brine(ethylene glycol 35wt%) *8 *10	kPa	106	50	
Temp range		Cooling	°C	Outlet water 5~25 *11		
		Water	°F	Outlet water 41~77 *11		
		Cooling	°C	Outlet brine -10~25 *8 *12		
		Brine(ethylene glycol 35wt%)	°F	Outlet brine 14~77 *8 *12		
		Outdoor	°C	-15~43 *11 *12		
			°F	5~109.4 *11 *12		
Circulating water volume range			m³/h	7.7~25.8		
Sound pressure level (measured in anechoic room) at 1m *1			dB (A)	65	63	
Sound power level (measured in anechoic room) *1			dB (A)	77	75	
Diameter of water pipe (Standard piping)		Inlet	mm (in)	50A (2B) housing type joint		
		Outlet	mm (in)	50A (2B) housing type joint		
Diameter of water pipe (Inside header piping)		Inlet	mm (in)	100A (4B) housing type joint		
		Outlet	mm (in)	100A (4B) housing type joint		
External finish			Polyester powder coating steel plate			
External dimension HxWxD			mm	2450 x 2250 x 900		
Net weight		Standard piping	kg (lbs)	957 (2110)		
		Inside header piping	kg (lbs)	992 (2187)		
Design pressure		R410A	MPa	4.15		
		Water	MPa	1.0		
Heat exchanger		Water side	Stainless steel plate and copper brazing			
		Air side	Plate fin and copper tube			
Compressor		Type	Inverter scroll hermetic compressor			
		Maker	MITSUBISHI ELECTRIC CORPORATION			
		Starting method	Inverter			
		Quantity	2			
		Motor output	kW	11.7 x 2		
		Case heater	kW	0.045 x 2		
		Lubricant	MEL32			
Fan			m³/min	77 x 6		
		Air flow rate	L/s	1283 x 6		
			cfm	2719 x 6		
		Type, Quantity	Propeller fan x 6			
		Starting method	Inverter			
		Motor output	kW	0.19 x 6		
Protection		High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)		
		Inverter circuit		Over-heat protection, Over current protection		
		Compressor		Over-heat protection		

Note.

- *1 Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F).
- *2 Pump input is not included.
- *3 Pump is not included in e-series.
- *4 EN14511 standard (2013) formula is applied to figure out this value in case of fixed flow rate operation (flow rate is fixed at any heat load)
- *5 EN14511 standard (2013) formula is applied to figure out this value in case of variable flow rate operation (flow rate varies per heat load). Pump input is included in cooling capacity for EER calculation. Condition of water temperature : inlet water temperature varies due to fixed water flow rate and outlet is fixed at outlet 7°C.
- *6 Calculations according to standard performances (in accordance with AHRI 550-590).
- *7 Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet brine temp -5°C (23.0°F) inlet brine temp 0°C (32.0°F).
- *8 Set the dipswitch SW3-6 on both main and sub modules to ON.
- *9 Under normal cooling conditions capacity 90kW, water flow rate 15.5m³/h
- *10 Under normal cooling conditions capacity 56.73kW, brine flow rate 11.5m³/h
- *Please don't use the steel material for the water piping.
- *Please always make water circulate, or pull the circulation water out completely when not in use.
- *Please do not use groundwater or well water in direct.
- *The water circuit must be closed circuit.
- *Due to continuous improvement, the above specifications may be subject to change without notice.

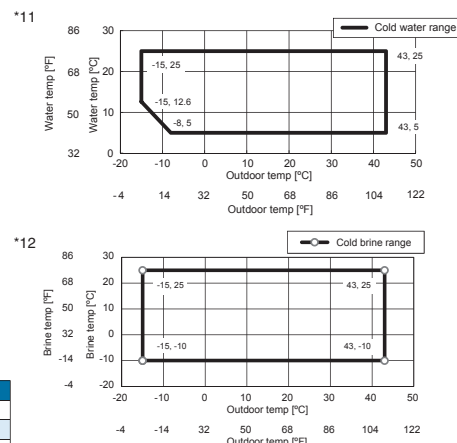

Unit converter	
kcal/h = kW x 860	
BTU/h = kW x 3,412	
lbs = kg/0.4536	
cfm = m³/min x 35.31	

Refrigerant			EACV-P900YAL(-N)(-BS)	EACV-P900YAF(-N)(-BS)
Type/GWP *1			R410A/2088	
Factory charged	Weight	kg	12	38
	CO ₂ equivalent *1	t	25.08	79.37
Maximum additional charge	Weight	kg	26	—
	CO ₂ equivalent *1	t	54.29	—
Total charge	Weight	kg	38	38
	CO ₂ equivalent *1	t	79.37	79.37

*1 These values are based on Regulation (EU) No.517/2014.


Specifications (Heatpump model)

Model			EAHV-P900YAL(-N)(-BS) EAHV-P900YAF(-N)(-BS)		
Power source			3-phase 4-wire 380-400-415V 50/60Hz		
Capacity change mode			Capacity priority	COP priority	
Cooling capacity *1			kW	90.00	63.00
			kcal/h	77,400	54,180
			BTU/h	307,080	214,956
Power input *3			kW	27.27	16.27
Current input 380-400-415V			A	46.0 - 43.7 - 42.2	27.5 - 26.1 - 25.2
Pump input is not included	EER		3.30		3.87
	ESEER		5.66		—
Certified value by EUROVENT	EER *4		2.94		3.76
	ESEER *4 * 6		4.71		—
ESEER (Includes pump input based on EN14511) *4 *7			5.46		—
SEER (Includes pump input based on EN14511) *4			4.88		—
IPLV *8			kW/kW	6.34	—
Water flow rate			m³/h	15.5	10.8
Heating capacity *2			kW	90.00	63.00
			kcal/h	77,400	54,180
			BTU/h	307,080	214,956
Power input *3			kW	25.71	16.96
Current input 380-400-415V			A	43.4 - 41.2 - 39.7	28.6 - 27.2 - 26.2
COP (Pump input is not included)			3.50		3.71
COP (Includes pump input based on EN14511) *4			3.25		3.61
SCOP (Reversible) Low/Medium (Includes pump input based on EN14511) *4			3.66/2.89		—
Seasonal space heating energy efficiency class for medium-temperature application			A+		—
Seasonal space heating energy efficiency class for low-temperature application			A+		—
Water flow rate			m³/h	15.5	10.8
Maximum current input			A	61	
Water pressure drop *5			kPa	135	65
Temp range	Cooling	°C		Outlet water 5~25 *9	
		°F		Outlet water 41~77 *9	
	Heating	°C		Outlet water 30~55 *9	
		°F		Outlet water 86~131 *9	
	Outdoor	°C		-15~43 *9	
		°F		5~109.4 *9	
Circulating water volume range			m³/h	7.7~25.8	
Sound pressure level (measured in anechoic room) at 1m *1			dB (A)	65	63
Sound power level (measured in anechoic room) *1			dB (A)	77	75
Diameter of water pipe (Standard piping)	Inlet	mm (in)		50A (2B) housing type joint	
	Outlet	mm (in)		50A (2B) housing type joint	
Diameter of water pipe (Inside header piping)	Inlet	mm (in)		100A (4B) housing type joint	
	Outlet	mm (in)		100A (4B) housing type joint	
External finish			Polyester powder coating steel plate		
External dimension HxWxD			mm	2450 x 2250 x 900	
Net weight	Standard piping	kg (lbs)		987 (2176)	
	Inside header piping	kg (lbs)		1022 (2253)	
Design pressure	R410A	MPa		4.15	
	Water	MPa		1.0	
Heat exchanger	Water side	Stainless steel plate and copper brazing			
	Air side	Plate fin and copper tube			
Compressor	Type	Inverter scroll hermetic compressor			
	Maker	MITSUBISHI ELECTRIC CORPORATION			
	Starting method	Inverter			
	Quantity	2			
	Motor output	kW	11.7 x 2		
	Case heater	kW	0.045 x 2		
	Lubricant	MEL32			
	Fan	Air flow rate	m³/min	77 x 6	
L/s			1283 x 6		
cfm			2719 x 6		
Type, Quantity		Propeller fan x 6			
Starting method		Inverter			
Motor output		kW	0.19 x 6		
Protection	High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)		
	Inverter circuit		Over-heat protection, Over current protection		
	Compressor		Over-heat protection		

Note.

- *1 Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F).
- *2 Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F).
- *3 Pump input is not included.
- *4 Pump is not included in e-series.
- *5 Under normal cooling or heating conditions capacity 90kW, water flow rate 15.5m³/h
- *6 EN14511 standard (2013) formula is applied to figure out this value in case of fixed flow rate operation (flow rate is fixed at any heat load)
- *7 EN14511 standard (2013) formula is applied to figure out this value in case of variable flow rate operation (flow rate varies per heat load)
- *8 Pump input is included in cooling capacity for EER calculation. Condition of water inlet and outlet is fixed at inlet 12°C and outlet 7°C.
- *9 Condition of water temperature : inlet water temperature varies due to fixed water flow rate and outlet is fixed at outlet 7°C.
- *8 Calculations according to standard performances (in accordance with AHRI 550-590).
- *Please don't use the steel material for the water piping.
- *Please always make water circulate, or pull the circulation water out completely when not in use.
- *Please do not use groundwater or well water in direct.
- *The water circuit must be closed circuit.
- *Due to continuous improvement, the above specifications may be subject to change without notice.

*9

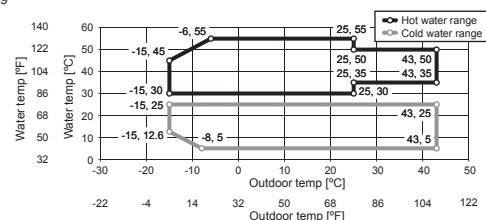

Unit converter	
kcal/h =	kW x 860
BTU/h =	kW x 3,412
lbs =	kg/0.4536
cfm =	m³/min x 35.31

Refrigerant			EAHV-P900YAL(-N)(-BS)	EAHV-P900YAF(-N)(-BS)
Type/GWP *1			R410A/2088	
Factory charged	Weight	kg	12	38
	CO ₂ equivalent *1	t	25.08	79.37
Maximum additional charge	Weight	kg	26	—
	CO ₂ equivalent *1	t	54.29	—
Total charge	Weight	kg	38	38
	CO ₂ equivalent *1	t	79.37	79.37

*1 These values are based on Regulation (EU) No.517/2014.

Specifications (Heating only model)

Model				EAHV-P900YAL-H(-N)(-BS) EAHV-P900YAF-H(-N)(-BS)	
Power source				3-phase 4-wire 380-400-415V 50/60Hz	
Capacity change mode				Capacity priorityCOP priority	
Heating capacity *1			kW	90.00	63.00
			kcal/h	77,400	54,180
			BTU/h	307,080	214,956
			kW	25.71	16.96
Power input *2			A	43.4 - 41.2 - 39.7	28.6 - 27.2 - 26.2
Current input 380-400-415V					
COP (Pump input is not included)				3.50	3.71
COP (Includes pump input based on EN14511) *3				3.25	3.61
SCOP (Heating only) Low/Medium (Includes pump input based on EN14511) *3				3.56/2.83	—
Seasonal space heating energy efficiency class for medium-temperature application				A+	—
Seasonal space heating energy efficiency class for low-temperature application				A+	—
Water flow rate			m³/h	15.5	10.8
Maximum current input			A	61	
Water pressure drop *5			kPa	135	65
Temp range		Heating	°C	Outlet water 30~55 *6	
			°F	Outlet water 86~131 *6	
		Outdoor	°C	-15~43 *6	
			°F	5~109.4 *6	
Circulating water volume range			m³/h	7.7~25.8	
Sound pressure level (measured in anechoic room) at 1m *4			dB (A)	65	63
Sound power level (measured in anechoic room) *4			dB (A)	77	75
Diameter of water pipe (Standard piping)	Inlet	mm (in)	50A (2B) housing type joint		
	Outlet	mm (in)	50A (2B) housing type joint		
Diameter of water pipe (Inside header piping)	Inlet	mm (in)	100A (4B) housing type joint		
	Outlet	mm (in)	100A (4B) housing type joint		
External finish			Polyester powder coating steel plate		
External dimension HxWxD			mm	2450 x 2250 x 900	
Net weight	Standard piping	kg (lbs)	987 (2176)		
	Inside header piping	kg (lbs)	1022 (2253)		
Design pressure	R410A	MPa	4.15		
	Water	MPa	1.0		
Heat exchanger	Water side		Stainless steel plate and copper brazing		
	Air side		Plate fin and copper tube		
Compressor	Type		Inverter scroll hermetic compressor		
	Maker		MITSUBISHI ELECTRIC CORPORATION		
	Starting method		Inverter		
	Quantity		2		
	Motor output	kW	11.7 x 2		
	Case heater	kW	0.045 x 2		
	Lubricant		MEL32		
Fan	Air flow rate	m³/min	77 x 6		
		L/s	1283 x 6		
		cfm	2719 x 6		
	Type, Quantity		Propeller fan x 6		
	Starting method		Inverter		
	Motor output	kW	0.19 x 6		
Protection	High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)		
	Inverter circuit		Over-heat protection, Over current protection		
	Compressor		Over-heat protection		

Note.

*1 Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F).

*2 Pump input is not included.

*3 Pump is not included in e-series.

*4 Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F).

*5 Under normal heating conditions capacity 90kW, water flow rate 15.5m³/h

*Please don't use the steel material for the water piping material.


*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water in direct.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.

*6

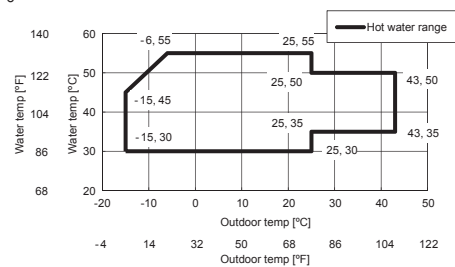

Refrigerant			EAHV-P900YAL-H(-N)(-BS)	EAHV-P900YAF-H(-N)(-BS)
Type/GWP *1			R410A/2088	
Factory charged	Weight	kg	12	38
	CO ₂ equivalent *1	t	25.08	79.37
Maximum additional charge	Weight	kg	26	—
	CO ₂ equivalent *1	t	54.29	—
Total charge	Weight	kg	38	38
	CO ₂ equivalent *1	t	79.37	79.37


*1 These values are based on Regulation (EU) No.517/2014.

Unit converter	
kcal/h	= kW x 860
BTU/h	= kW x 3,412
lbs	= kg/0.4536
cfm	= m³/min x 35.31

Modular Chiller

P1500/P1800

EAHV-P1500YBL(-N)(-BS) EAHV-P1800YBL(-N)(-BS)
EAHV-P1500YBL-H(-N)(-BS) EAHV-P1800YBL-H(-N)(-BS)
EACV-P1500YBL(-N)(-BS) EACV-P1800YBL(-N)(-BS)

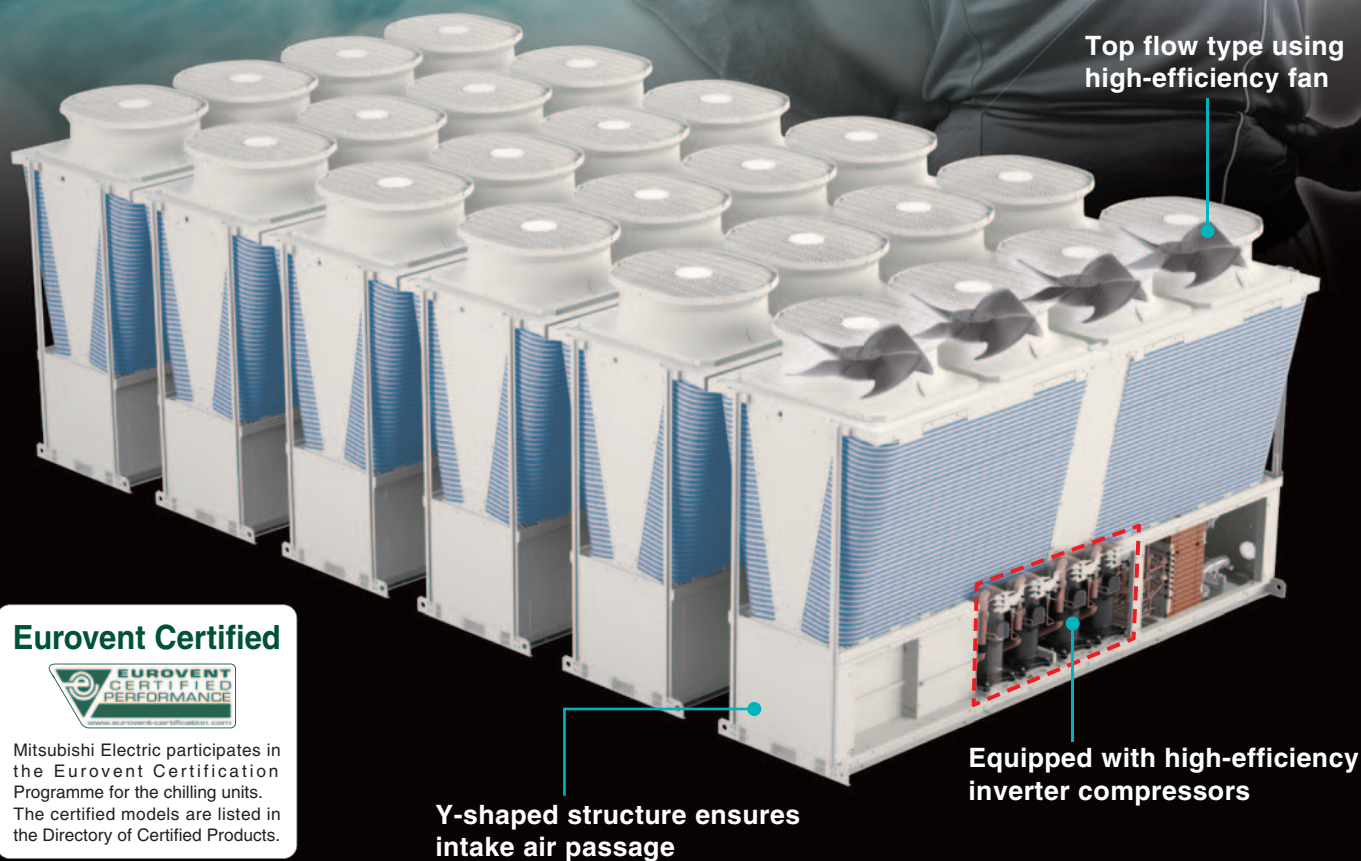

Eurovent Certified



Mitsubishi Electric participates in the Eurovent Certification Programme for the chilling units. The certified models are listed in the Directory of Certified Products.

(Only heatpump and cooling model)

1 High energy saving performance by the use of inverter compressors

- High energy-saving performance thanks to high-performance inverter compressor and proprietary Y-shaped construction.

2 High functionality of modular chiller

- Up to 6 units of each module can be connected among 1 group, so capacity can be increased up to 360HP(60HP × 6 units).
- Optimum frequency control when connecting multiple units ensures energy savings.
- Emergency operation mode and rotation operation are available.

3 Saving space and construction work

- Inside header series available for space savings and construction savings of piping components.

High energy saving performance

The rated and seasonal energy efficiency ratios have been increased to achieve high energy saving performance.

Rated efficiency

**Eurovent efficiency class
Rank A achieved*1**

Model	
P1500	EER 3.19 ^{*1}
	COP 3.29 ^{*2}

The use of the high-efficiency inverter compressors achieves high energy saving performance. The 50 HP model has cooling EER and heating COP rating corresponding to energy saving class A.

*1 Under normal cooling conditions at outdoor temp 35°DB/24°WB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

*2 Under normal heating conditions at outdoor temp 7°DB/6°WB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is included in heating capacity and power input based on EN14511.

Seasonal efficiency

Model	
P1500	SEER 4.62 ^{*1}
P1800	SEER 4.58 ^{*1}

The use of the high-efficiency inverter compressors ensures optimum operation according to the operation load. The compressors can operate efficiently even during nighttime and intermediate seasons with low load, thereby saving energy throughout the year.

*1 Compliant with EN14511


Key components save energy

By controlling the frequency of the inverter compressors, the rated efficiency and the seasonal efficiency are higher. This achieves optimum energy saving according to the operation load.

Equipped with high-efficiency inverter compressors

Each unit is equipped with four high-efficiency inverter compressors, developed by Mitsubishi Electric. The four compressors operate as two pairs. The inverters observe the load and control the compressors so that they can optimally operate in one unit.

The compressors use the IH warmer method. Heat is generated by the magnetic material characteristics of the motor core unit to prevent liquid refrigerant from remaining in the compressor when the unit stops. This reduces standby power compared to the crankcase heater method when the unit is stopped.

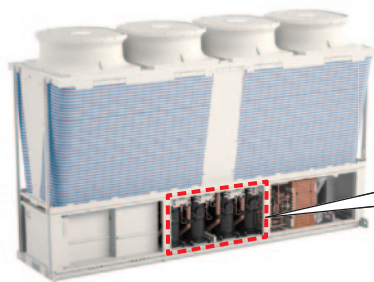


**IH (Introduction heating)
warmer method
(without crankcase heater)**



Heated compressor motor

Use of Y-shape structure for effective operation

When the modules are connected, the intake air passages can be ensured on the floor and sides. This structure contributes to effective operation.

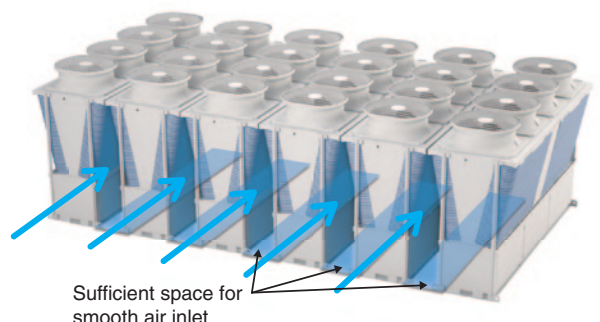

Sufficient space for
smooth air inlet

High functionality of modular chiller

The capacity among 1 group can be increased to up to 360 HP by combining units.

- Large-capacity 50 HP and 60 HP units are available.

Even a 360 HP system using six 60 HP units can be installed in a floor area of 8.53 m × 5.2 m including the service space.

* Only modules with the same capacity can be combined.




Heat Pump	EAHV-P1500YBL(-N)
Heating Only	EAHV-P1500YBL-H(-N)
Cooling Only	EACV-P1500YBL(-N)



Heat Pump	EAHV-P1800YBL(-N)
Heating Only	EAHV-P1800YBL-H(-N)
Cooling Only	EACV-P1800YBL(-N)

* (-N) indicates an inside header model.

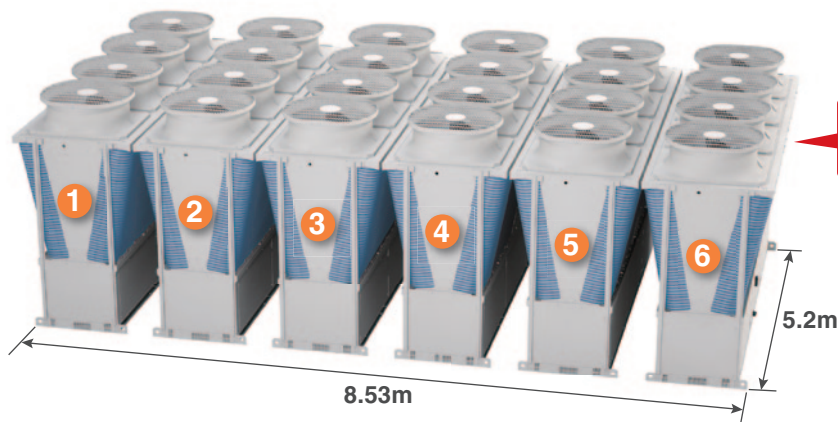


Up to 6 units can be connected

Optimum frequency control for further energy saving

When multiple units are connected, the frequency of each compressor is controlled during operation to increase the efficiency of each unit, achieving high energy saving performance. This control can be implemented by simply connecting to our unique M-NET without needing any other on-site design.


* The following is an example of operation.

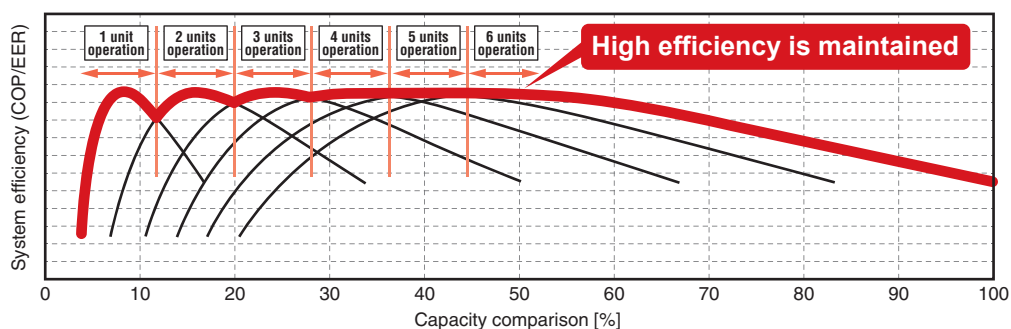

When the overall system load is 60%


* The following is an example of operation.

Without optimum frequency control

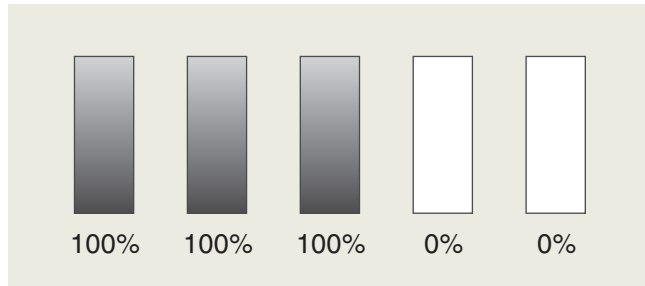

With non-inverter compressors, it is only possible to turn the unit on or off, and the compressor frequency cannot be adjusted according to the required capacity.


With optimum frequency control

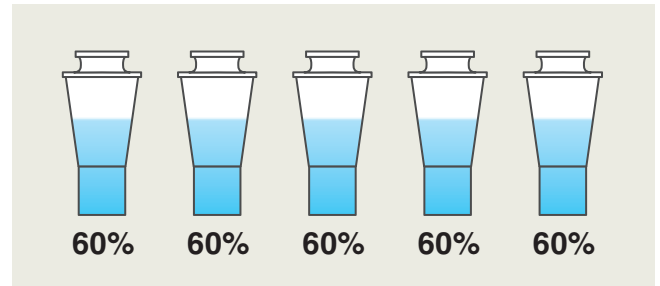

Our units are equipped with inverter compressors, so the system can be operated in frequency ranges in which the efficiency of each unit is high. Optimum frequency control of each unit increases the efficiency of the whole system.

When the overall system load is 30%


Without optimum frequency control

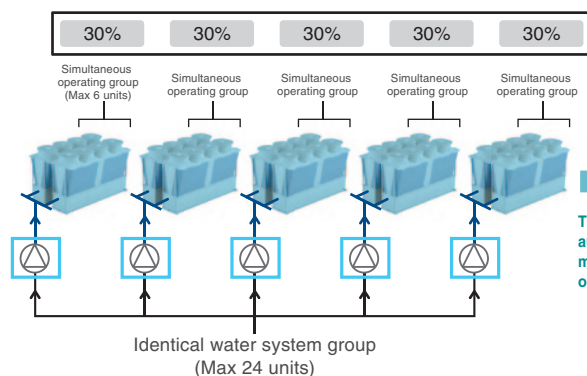

Since the compressors of all groups are running at inefficient frequencies, the efficiency of the whole system lower.

In addition, all the pumps are operating becomes with the units, lowering the system efficiency further.

With optimum frequency control

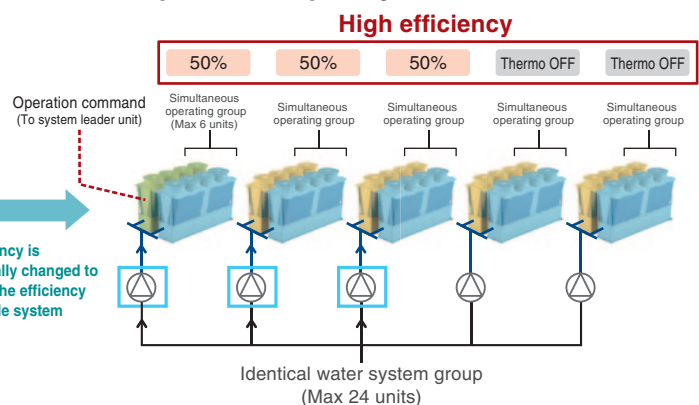

The load of identical water system groups is observed, and the frequency of each group can be controlled to increase the efficiency. As shown in the above image, when the overall system load is 30%, three groups are operated at 50% at which the efficiency of each group is high, and the remaining groups are set to the thermo OFF state. Then, the output of the pumps connected to the remaining group can be decreased, and the efficiency of the whole system can be increased. This control is completed by connecting to M-NET. There is no need to prepare sensors, and the instrumentation is simple.


[■ System leader unit ■ Group leader unit ■ Sub unit]

Operation of optimum frequency control

- One system leader unit is specified to control the modules in the system.
- The board of the system leader unit collects the operating frequency of each unit.
- The board of the system leader unit calculates the number of running units with which the system can be operated at high efficiency.
- The system leader unit transmits the start or stop command to each group leader unit.
- Each sub unit starts or stops according to the operation of the group leader unit.

Combination control function

When a single unit

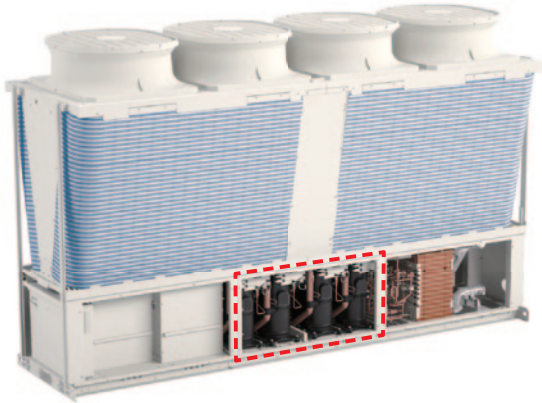


- The unit contains four compressors developed by Mitsubishi Electric.
- The four compressors operate as two pairs. If something is wrong with one of the two pairs, the other pair (2 compressors) can temporarily continue to operate.

When multiple units


- The flexible backup operation among the combined units enables the continuous operation, even one unit is stopped due to maintenance.

Non-modular chiller

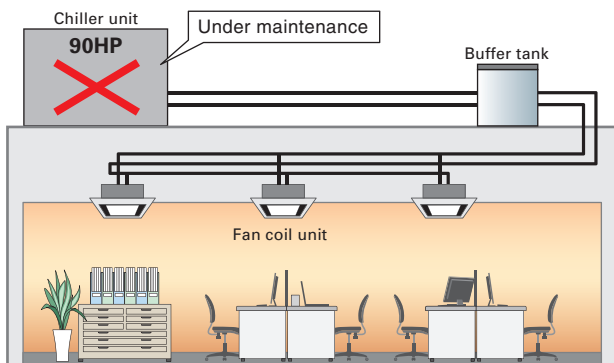

Since the chiller unit can not operate during maintenance, the timing of maintenance is limited.

Mitsubishi Electric modular chiller

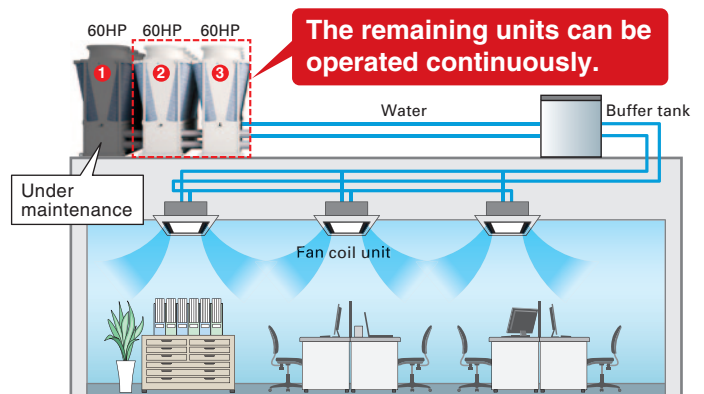

With our module chiller system, even if one unit is stopped, the remaining units back the continuous operation up.

*When performing maintenance, please confirm that the remaining units meet the required capacity for the indoor side.

Rotation operation

When multiple units are installed, the operating time of each unit in the same system can be equalized according to the load of the whole system.



Saving space and installation saving


Selectable piping system

Standard piping and built-in header types are available. The optimum type can be selected according to the design and construction needs of the building.

Lineup

■ Standard piping type

Type without built-in pump or header

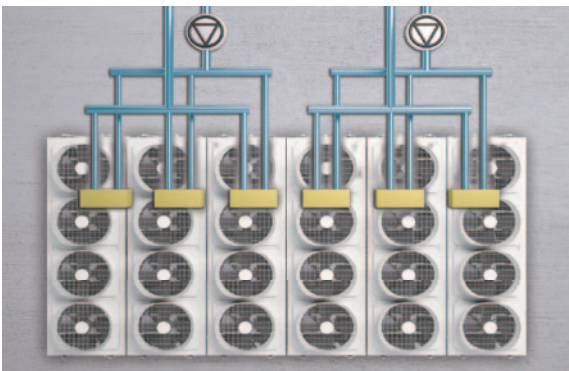


Advantages

The flexibility of design is high, and it is possible to select the most suitable number of pumps and water circuit for the on-site system.

■ Built-in header type (models with "-N" in the name only)

Type of built-in header piping for connection between modules

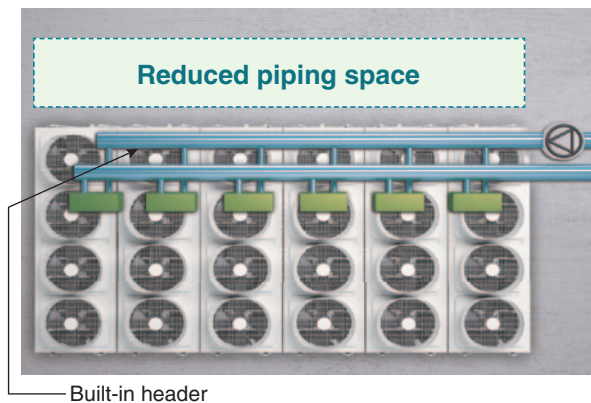

Advantages


The piping space and number of connections are reduced, allowing simple construction and short construction times.

* It is not possible to build both the pump and the header in each unit.


■ Standard piping type

The flexibility of design is high, and the system can be designed according to the on-site system and load pattern. Up to 24 units (4 groups × 6 units) can be connected to one system. The number of pumps and the piping structure can be designed according to the on-site.

<System with 6 chillers and one pump>

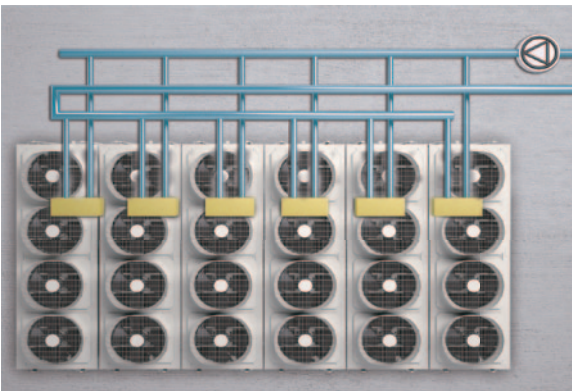

<System with 6 chillers and 2 pumps>

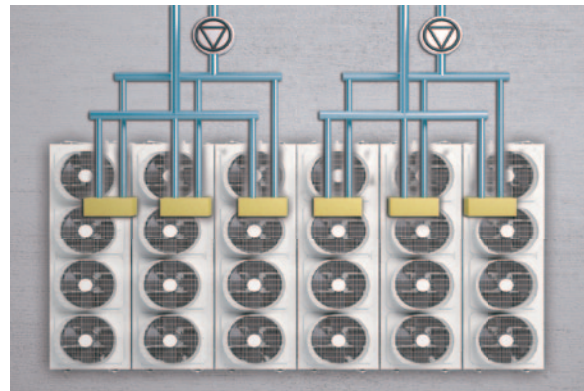

■ Built-in header type


(models with "-N" in the name only)

The piping to connect to other units is built into each unit. The number of piping connections is reduced (saving construction work and reducing the construction time), and the installation space can be also reduced.


Space saving

Construction saving

<Standard piping construction>

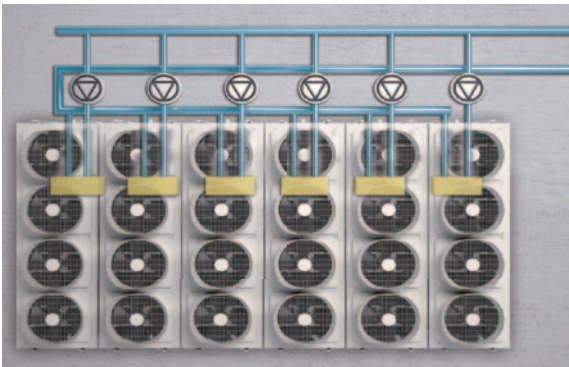


<Built-in header type>

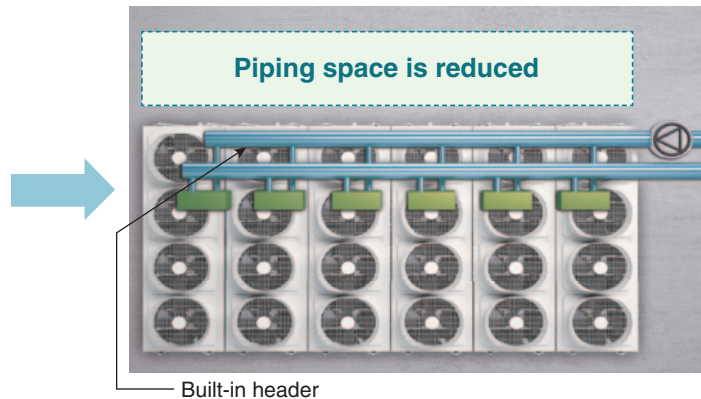


Space for return piping is not required

<Standard piping construction>

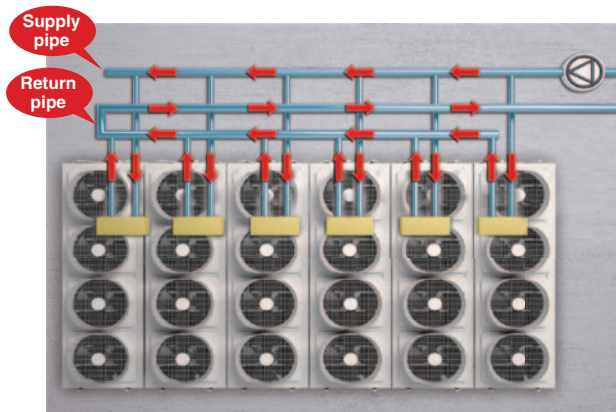

<Built-in header type>

(models with "-N" in the name only)

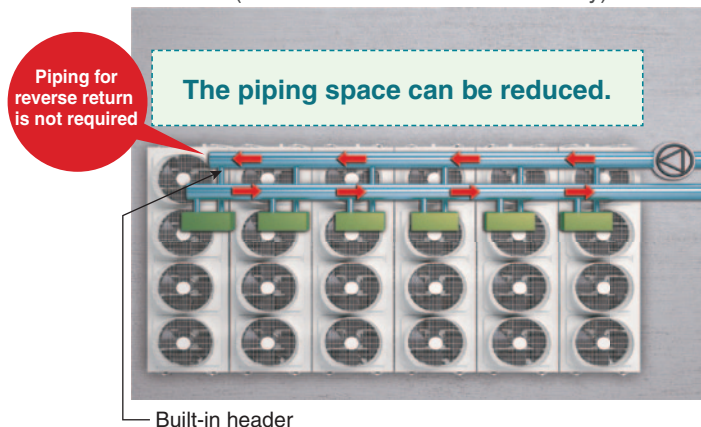

With standard piping construction, the customer must determine and design the return piping.

The supply pipe and return pipe of each unit should have the same overall length and piping resistance to keep a balance among the flow rates to the units. Therefore, piping space and equipment costs are required.



The size of the piping for the built-in header type is large to reduce pressure loss in the piping. It is unnecessary to prepare the piping for reverse return.

This helps to reduce piping space and equipment cost.


Details of built-in header type modules

Up to six units with built-in headers can be connected. (Piping size: 150A)

When 6 units or a less are connected, flow adjustment and reverse return piping for each unit are unnecessary.

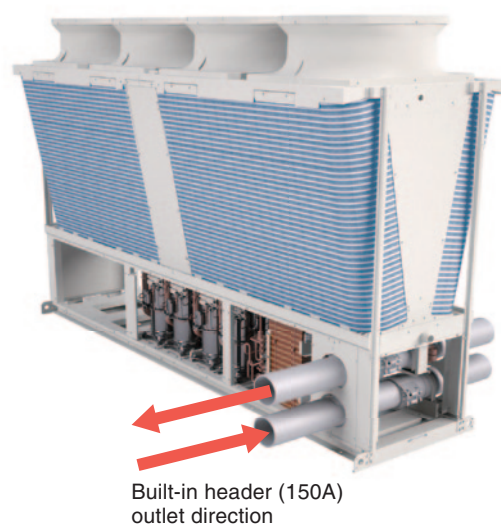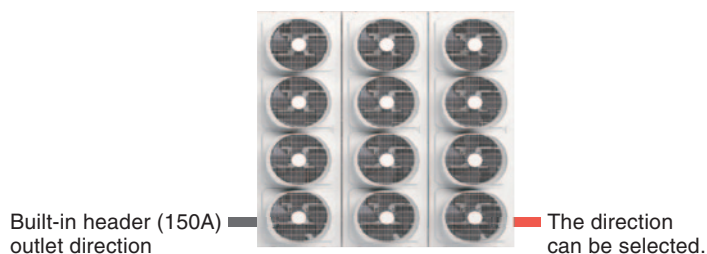


Example of construction for built-in header type modules

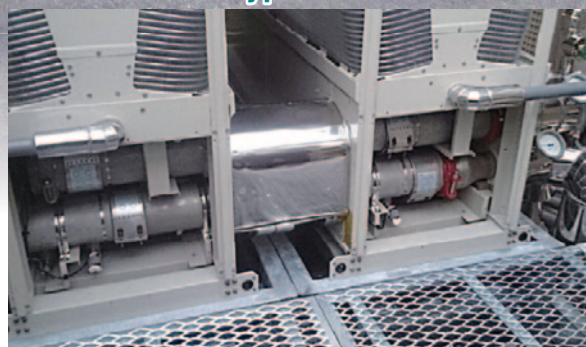

* Heat insulation of the connection piping between units must be applied on site.



Procedure for installing the connection kit

Installation of end connection kit (DT-01HK, excluding panels)

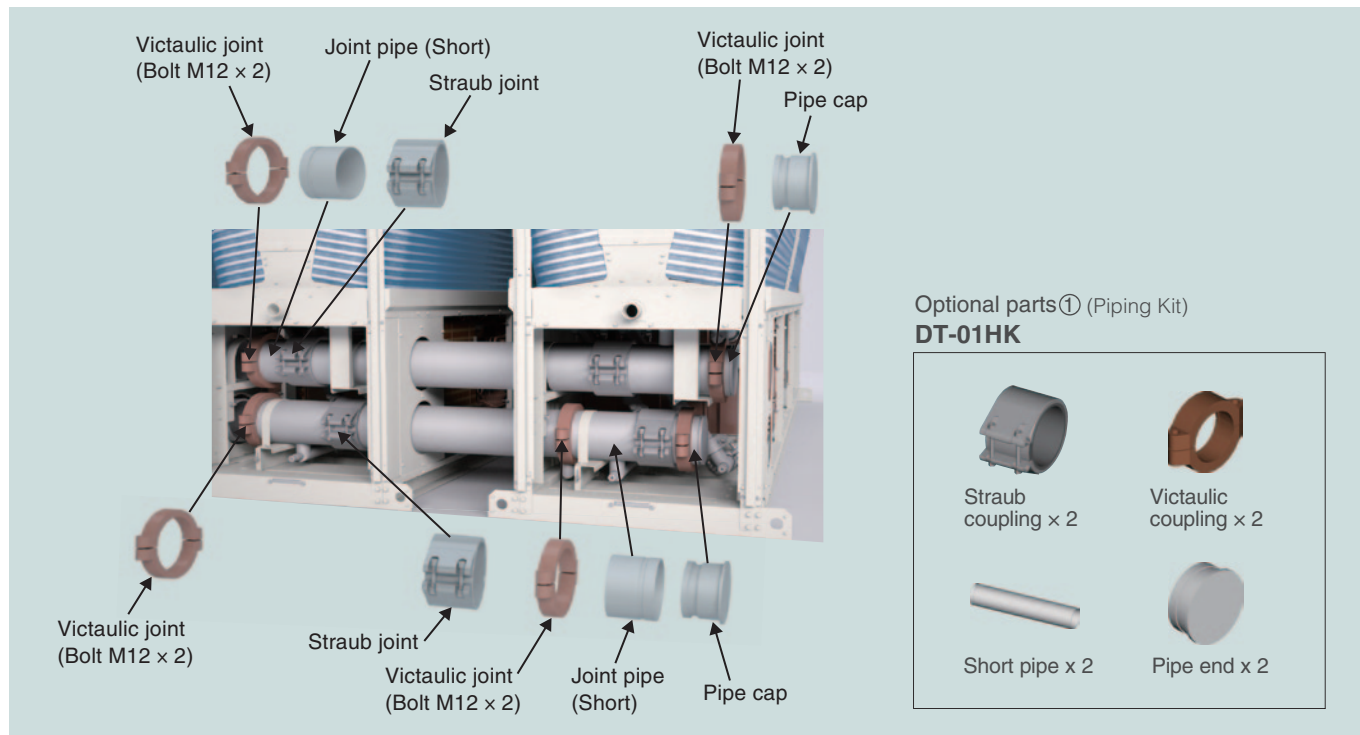

Installation of connection kit (DT-02HK, excluding panels)

* Please remove the panels before installing the connection kit.

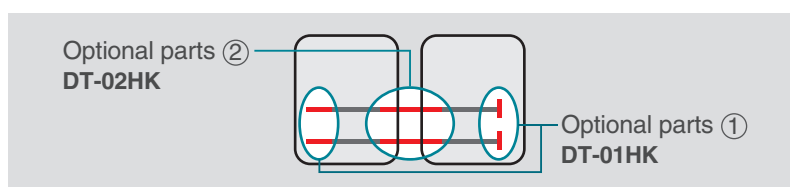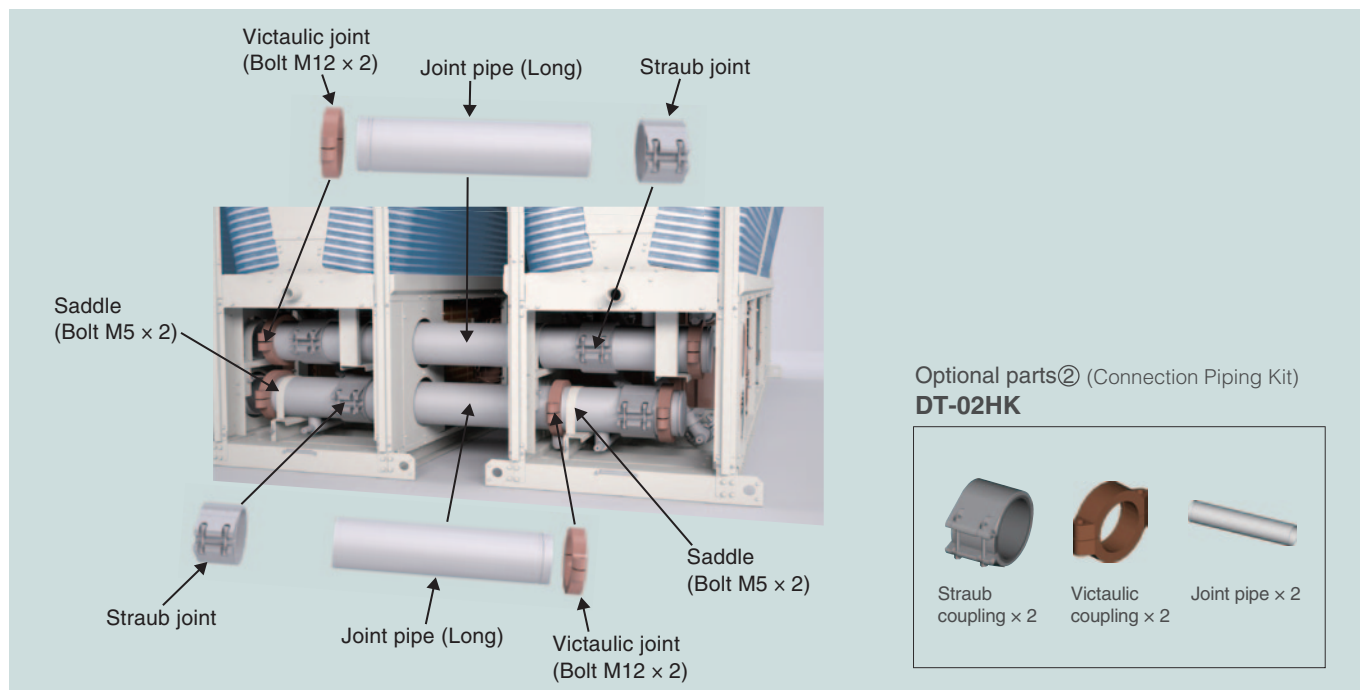




Installation of panels

- 1 Install the panels on the end unit.

* Note: Install panel S and then the closing panel.

- 2 Install panel B.

Seen from the opposite side of
the maintenance access side

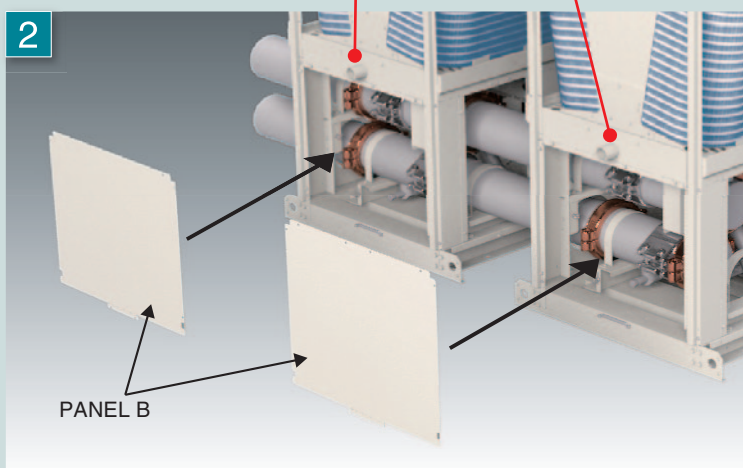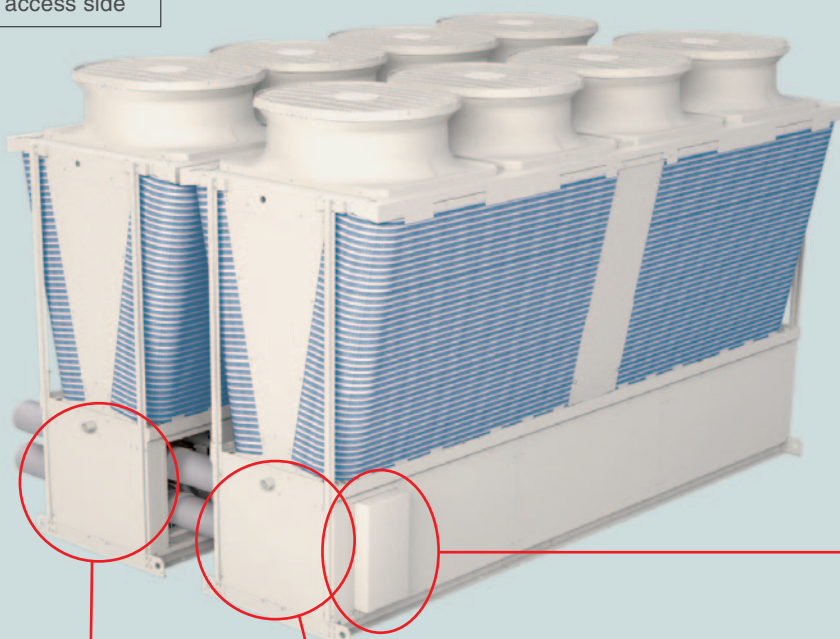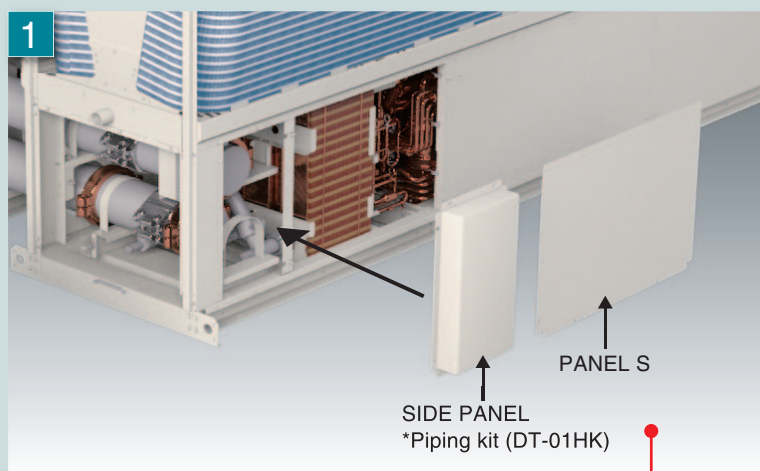

Control information

* P1500, P1800 models cannot connect to AE-200E/A, EW-50E/A.

Remote controller

You can perform basic operations, such as starting, stopping, mode switching, water temperature setting and schedule setting, by connecting a remote controller.



● Major functions

Operation/setting	ON/OFF
	Cooling/Heating/HeatingECO/Anti-freeze
	Snow/regular
	Demand
	Scheduled operation (daily/weekly)
Display	Operation mode
	Current water temperature
	Error code
Control function (function of chiller body)	Control of number of units
	Control to prevent simultaneous defrosting

External signal input

Basic operations, such as starting, stopping, mode switching and water temperature setting, can be performed by inputting external signals directly to the unit.

* Optional products, such as remote controllers, are not always required.



● Major functions

Input	ON/OFF
	Cooling/Heating
	Snow/regular
	Demand
	Target water temperature
Output	Operation mode
	Under operation
	Under defrosting
	Error
Control function (function of chiller)	Control of number of units
	Control to prevent simultaneous defrosting



Specifications (Cooling only model)

Model				EACV-P1500YBL(-N)(-BS)		EACV-P1800YBL(-N)(-BS)		
Power source				3-phase 4-wire 380-400-415V 50/60Hz				
Cooling capacity *1			kW	150.00		180.00		
			kcal/h	129,000		154,800		
			BTU/h	511,800		614,160		
		Power input	kW	45.10		59.01		
		EER		3.33		3.05		
		IPLV *5		6.55		6.33		
Cooling capacity(EN14511) *2		Water flow rate	m³/h	25.8		31.0		
			kW	148.58		177.76		
			kcal/h	127,779		152,874		
			BTU/h	506,955		606,517		
		Power input	kW	46.52		61.25		
		EER		3.19		2.90		
		Eurovent efficiency class		A		B		
		ESEER *6		4.74		4.45		
		SEER		4.62		4.58		
		Water flow rate	m³/h	25.8		31.0		
		Current input	Cooling current 380-400-415V *1	A	77 - 73 - 70			
		Maximum current		A	111			
Water pressure drop *1			kPa	114		164		
Temp range		Cooling	°C	Outlet water 5~30 *7				
			°F	Outlet water 41~86 *7				
		Outdoor	°C	-15~43 *6				
			°F	5~109.4 *6				
Circulating water volume range			m³/h	12.9~34.0				
Sound pressure level (measured in anechoic room) at 1m *1			dB (A)	66		68		
Sound power level (measured in anechoic room) *1			dB (A)	84		86		
Diameter of water pipe (Standard piping)		Inlet	mm (in)	65A (2 1/2B) housing type joint				
		Outlet	mm (in)	65A (2 1/2B) housing type joint				
Diameter of water pipe (Inside header piping)		Inlet	mm (in)	150A (6B) housing type joint				
		Outlet	mm (in)	150A (6B) housing type joint				
External finish				Polyester powder coating steel plate				
External dimension HxWxD			mm	2350 x 3400 x 1080				
Net weight		Standard piping	kg (lbs)	1240 (2734)				
		Inside header piping	kg (lbs)	1256 (2769)				
Design pressure		R410A	MPa	4.15				
		Water	MPa	1.0				
Heat exchanger		Water side		Stainless steel plate and copper brazing				
		Air side		Plate fin and copper tube				
Compressor		Type		Inverter scroll hermetic compressor				
		Maker		MITSUBISHI ELECTRIC CORPORATION				
		Starting method		Inverter				
		Quantity		4				
		Motor output	kW	11.7 x 4				
		Lubricant		MEL32				
Fan		Air flow rate	m³/min	265 x 4				
			L/s	4417 x 4				
			cfm	9357 x 4				
		Type, Quantity		Propeller fan x 4				
		Starting method		Inverter				
		Motor output	kW	0.94 x 4				
Protection		High pressure protection		High pres.Sensor & High pres.Switch at 4.15MPa (601psi)				
		Inverter circuit		Over-heat protection, Over current protection				
		Compressor		Over-heat protection				
Refrigerant *3	Type / GWP *4			R410A / 2088				
	Factory charged	Weight	kg	12.0				
		CO2 equivalent *4	t	25.06				
	Maximum additional charge	Weight	kg	48.0				
		CO2 equivalent *4	t	100.23				
	Total charge	Weight	kg	60.0				
		CO2 equivalent *4	t	125.29				
		Control		LEV				

Note.

*1 Under normal cooling conditions at outdoor temp 35°CDB/24°CWB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is not included in cooling capacity and power input.

*2 Under normal cooling conditions at outdoor temp 35°CDB/24°CWB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

*3 Amount of factory-charged refrigerant is 3(kg) x 4. Please add the refrigerant at the field.

*4 These values are based on Regulation(EU) No.517 / 2014.

*5 IPLV is calculated in accordance with AHRI 550-590.

*6 ESEER is calculated in accordance with EUROVENT conditions.

*Please don't use the steel material for the water piping.


*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water in direct.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.

*This model doesn't equip with a pump.

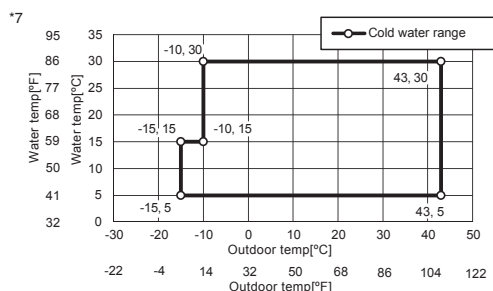

Unit converter	
kcal/h =	kW x 860
BTU/h =	kW x 3,412
lbs =	kg/0.4536
cfm =	m ³ /min x 35.31

Specifications (Heatpump model)

Model				EAHV-P1500YBL(-N)(-BS)	EAHV-P1800YBL(-N)(-BS)
Power source				3-phase 4-wire 380-400-415V 50/60Hz	
Cooling capacity *1			kW	150.00	180.00
			kcal/h	129,000	154,800
			BTU/h	511,800	614,160
	Power input		kW	45.10	59.01
			EER	3.33	3.05
			IPLV *7	6.55	6.33
Cooling capacity(EN14511) *2			Water flow rate	25.8	31.0
			m ³ /h		
			kW	148.58	177.76
			kcal/h	127,779	152,874
			BTU/h	506,955	606,517
			kW	46.52	61.25
Heating capacity *3			EER	3.19	2.90
			Eurovent efficiency class	A	B
			ESEER *8	4.74	4.45
			SEER	4.62	4.58
			Water flow rate	25.8	31.0
			m ³ /h		
Heating capacity(EN14511) *4			kW	150.00	180.00
			kcal/h	129,000	154,800
			BTU/h	511,800	614,160
			kW	44.59	55.68
			COP	3.36	3.23
			Water flow rate	25.8	31.0
Current input			m ³ /h	151.42	182.24
			kW	130,221	156,726
			BTU/h	516,645	621,803
			kW	46.01	57.92
			COP	3.29	3.15
			Eurovent efficiency class	A	B
Water pressure drop *1			SCOP(Reversible) Low/Medium	3.24 / 2.85	
			Water flow rate	25.8	31.0
			m ³ /h		
			Cooling current 380-400-415V *1	A	77 - 73 - 70
			Heating current 380-400-415V *3	A	76 - 72 - 69
			Maximum current	A	111
Temp range			kPa	114	164
			°C	Outlet water 5-30 *9	
			°F	Outlet water 41-86 *9	
			°C	Outlet water 30-55 *9	
			°F	Outlet water 86-131 *9	
			°C	-15-43 *9	
Circulating water volume range			°F	5-109.4 *9	
			m ³ /h	12.9-34.0	
			dB(A)	66	68
			dB(A)	84	86
			mm (in)	65A (2 1/2B) housing type joint	
			mm (in)	65A (2 1/2B) housing type joint	
External finish			mm (in)	150A (6B) housing type joint	
			mm (in)	150A (6B) housing type joint	
			mm (in)	150A (6B) housing type joint	
			mm (in)	Polyester powder coating steel plate	
			mm	2350 x 3400 x 1080	
			kg (lbs)	1310 (2888)	
Net weight			kg (lbs)	1326 (2923)	
			MPa	4.15	
			MPa	1.0	
			Water side	Stainless steel plate and copper brazing	
			Air side	Plate fin and copper tube	
			Type	Inverter scroll hermetic compressor	
Compressor			Maker	MITSUBISHI ELECTRIC CORPORATION	
			Starting method	Inverter	
			Quantity	4	
			Motor output	11.7 x 4	
			Lubricant	MEL32	
			m ³ /min	265 x 4	
Fan			L/s	4417 x 4	
			cfm	9357 x 4	
			Type, Quantity	Propeller fan x 4	
			Starting method	Inverter	
			Motor output	0.92 x 4	
			kW	High pres.Sensor & High pres.Switch at 4.15MPa (601psi)	
Protection			High pressure protection	Over-heat protection, Over current protection	
			Inverter circuit	Over-heat protection	
			Compressor	R410A / 2088	
			Weight	12.0	
			CO ₂ equivalent *6	25.06	
			Weight	48.0	
Refrigerant *5			CO ₂ equivalent *6	100.23	
			Weight	60.0	
			CO ₂ equivalent *6	125.29	
			Control	LEV	

Note.

*1 Under normal cooling conditions at outdoor temp 35°DB/24°WB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is not included in cooling capacity and power input.

*2 Under normal cooling conditions at outdoor temp 35°DB/24°WB(95°FDB/75.2°FWB) outlet water temp 7°C(44.6°F) inlet water temp 12°C(53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

*3 Under normal heating conditions at outdoor temp 7°DB/6°WB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is not included in heating capacity and power input.

*4 Under normal heating conditions at outdoor temp 7°DB/6°WB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is included in heating capacity and power input based on EN14511.

*5 Amount of factory-charged refrigerant is 3(kg) x 4. Please add the refrigerant at the field.

*6 These values are based on Regulation(EU) No.517 / 2014.

*7 IPLV is calculated in accordance with AHRI 550-590.

*8 ESEER is calculated in accordance with EUROVENT conditions.

*Please don't use the steel material for the water piping.


*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water in direct.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.

*This model doesn't equip with a pump.

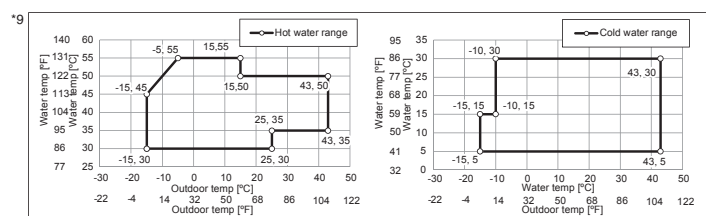

Unit converter	
kcal/h = kW x 860	
BTU/h = kW x 3,412	
lbs = kg/0.4536	
cfm = m ³ /min x 35.31	

Specifications (Heating only model)

Model				EAHV-P1500YBL-H(-N)(-BS)		EAHV-P1800YBL-H(-N)(-BS)			
Power source				3-phase 4-wire 380-400-415V 50/60Hz					
Heating capacity *1				kW	150.00		180.00		
				kcal/h	129,000		154,800		
				BTU/h	511,800		614,160		
			Power input	kW	44.59		55.68		
				COP	3.36		3.23		
Heating capacity(EN14511) *2			Water flow rate	m³/h	25.8		31.0		
				kW	151.42		182.24		
				kcal/h	130,221		156,726		
				BTU/h	516,645		621,803		
			Power input	kW	46.01		57.92		
			COP		3.29		3.15		
			Eurovent efficiency class			A		B	
			SCOP(Heating only) Low/Medium			3.20 / 2.83			
			Water flow rate	m³/h	25.8		31.0		
			Heating current 380-400-415V *1	A	76 - 72 - 69				
Current input			Maximum current	A	111				
Water pressure drop *1				kPa	114		164		
Temp range			Cooling		°C			Outlet water 30-55 *5	
					°F			Outlet water 86-131 *5	
			Outdoor		°C			-15-43 *4	
					°F			5-109.4 *4	
Circulating water volume range				m³/h	12.9-34.0				
Sound pressure level (measured in anechoic room) at 1m *1				dB (A)	66		68		
Sound power level (measured in anechoic room) *1				dB (A)	84		86		
Diameter of water pipe (Standard piping)		Inlet		mm (in)	65A (2 1/2B) housing type joint				
		Outlet		mm (in)	65A (2 1/2B) housing type joint				
Diameter of water pipe (Inside header piping)		Inlet		mm (in)	150A (6B) housing type joint				
		Outlet		mm (in)	150A (6B) housing type joint				
External finish				Polyester powder coating steel plate					
External dimension HxWxD				mm	2350 x 3400 x 1080				
Net weight		Standard piping		kg (lbs)	1310 (2888)				
		Inside header piping		kg (lbs)	1326 (2923)				
Design pressure			R410A		4.15				
			Water		1.0				
Heat exchanger			Water side	Stainless steel plate and copper brazing					
			Air side	Plate fin and copper tube					
Compressor			Type	Inverter scroll hermetic compressor					
			Maker	MITSUBISHI ELECTRIC CORPORATION					
			Starting method	Inverter					
			Quantity	4					
			Motor output		kW	11.7 x 4			
			Lubricant	MEL32					
Fan			Air flow rate	m³/min	265 x 4				
				L/s	4417 x 4				
				cfm	9357 x 4				
			Type, Quantity	Propeller fan x 4					
			Starting method	Inverter					
			Motor output		kW	0.94 x 4			
Protection			High pressure protection	High pres.Sensor & High pres.Switch at 4.15MPa (601psi)					
			Inverter circuit	Over-heat protection, Over current protection					
			Compressor	Over-heat protection					
			R410A / 2088						
Refrigerant *3	Type / GWP *4								
	Factory charged	Weight	kg	12.0					
		CO2 equivalent *4	t	25.06					
	Maximum additional	Weight	kg	48.0					
		CO2 equivalent *4	t	100.23					
	Total charge	Weight	kg	60.0					
CO2 equivalent *4		t	125.29						
			Control						
			LEV						

Note.

*1 Under normal heating conditions at outdoor temp 7°CDB/6°CWB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is not included in heating capacity and power input.

*2 Under normal heating conditions at outdoor temp 7°CDB/6°CWB(44.6°FDB/42.8°FWB) outlet water temp 45°C(113°F) inlet water temp 40°C(104°F). Pump input is included in heating capacity and power input based on EN14511.

*3 Amount of factory-charged refrigerant is 3(kg) x 4. Please add the refrigerant at the field.

*4 These values are based on Regulation(EU) No.517 / 2014.

*Please don't use the steel material for the water piping.


*Please always make water circulate, or pull the circulation water out completely when not in use.

*Please do not use groundwater or well water in direct.

*The water circuit must be closed circuit.

*Due to continuous improvement, the above specifications may be subject to change without notice.

*This model doesn't equip with a pump.

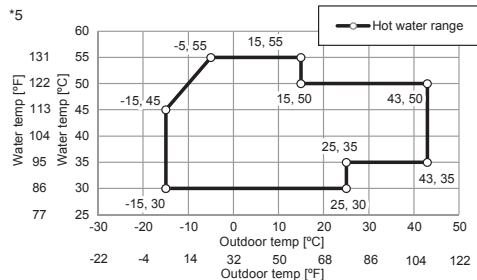

Unit converter	
kcal/h = kW x 860	
BTU/h = kW x 3,412	
lbs = kg/0.4536	
cfm = m ³ /min x 35.31	



for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.

⚠ Warning

- Do not use refrigerant other than the type indicated in the manuals provided with the unit and on the nameplate.
 - Doing so may cause the unit or pipes to burst, or result in explosion or fire during use, repair, or at the time of disposal of the unit.
 - It may also be in violation of applicable laws.
 - MITSUBISHI ELECTRIC CORPORATION cannot be held responsible for malfunctions or accidents resulting from the use of the wrong type of refrigerant.
- Our air-cooled Chilling Units contain a fluorinated greenhouse gas, R410A (GWP:2088). This GWP value is based on Regulation (EU) No. 517/2014 from IPCC 4th edition. In case of Regulation (EU) No. 626/2011 from IPCC 3rd edition, this is as follows. R410A (GWP:1975)

e-series

mitsubishi electric corporation

www.MitsubishiElectric.com