

家·多一點通氣舒爽

抽氣扇·導管式通風扇
Exhaust Fan · Duct Ventilator

為房間選擇合適的通風設備

CHOOSING THE RIGHT VENTILATOR FOR YOUR ROOM

只需根據以下圖表，按照房間類型、面積和所需風量，即可輕鬆選擇到合適的通風設備。
You can simply select the appropriate ventilator in the following table based on the room type, area and required air volume.

通風設備選擇一覽表 TABLE OF VENTILATOR SELECTION

住宅 Residence						酒店 Hotel		辦公室 Office	住宅 Residence			通風管 With Duct
廚房 Kitchen	浴室 Bathroom	客廳 Living Room	房間 Room	浴室 Bathroom	辦公室 Office	所需風量 Required Air Volume			窗戶 Window	牆壁 Wall	天花板 Ceiling	
換氣次數/小時 Air Changes Per Hour												
15	10	6	5	10	6							

房間面積 (m²) / 所需風量 (m³/h) Room Area (m²) / Required Air Volume (m³/h)										型號 (風量) Model (Air Volume)		型號 (風量) Model (Air Volume)	
2 (81)	2-3 (81)		2-6 (81)	2-3 (81)		0-100					VD-10Z4T6 (100)		
3-4 (162)	4-6 (162)	6-10 (162)	7-14 (189)	4-6 (162)	7-10 (162)	100-200					VD-15Z4T7 (157)		
5-7 (283.5)	7-10 (270)	11-17 (275.4)	15-21 (283.5)	7-10 (270)	11-17 (275.4)	201-300	V-15SL6T (230) V-15EWG6T (270)				VD-15ZP4T7 (217)		
8-9 (364.5)	11-14 (378)	18-23 (372.6)	22-27 (364.5)	11-14 (378)	18-23 (372.6)	301-400	V-20SL7T (390)				VD-18Z4T7 (335)		
10-11 (445.5)	15-16 (432)	24-28 (453.6)	28-35 (472.5)	15-16 (432)	24-28 (453.6)	401-500	V-20EWG7T (460)				VD-20Z4T7 (440)		
12-14 (567)	17-21 (567)	29-35 (567)	36-42 (567)	17-21 (567)	29-35 (567)	501-600	EX-20SKC7T (550) EX-20SHC7T (580)				VD-20ZP4T5 (510/370) VD-23Z4T5 (580/360)		
15-16 (648)	22-25 (675)	36-41 (664.2)		22-25 (675)	36-41 (664.2)	601-700							
17-18 (729)	26-27 (729)	42-47 (761.4)			42-47 (761.4)	701-800					VD-23ZP4T5 (715/450)		
19-21 (850.5)		48-50 (810)			48-50 (810)	801-900	EX-25SKC7T (800)						
22-23 (931.5)					51-59 (955.8)	901-1,000	EX-25SHC7T (950)						
24-26 (1,053)					60-65 (1,053)	1,001-1,100							
27-29 (1,174.5)					66-74 (1,198.4)	1,101-1,200	EX-30SHC7T (1170)						

面積越大，所需風量越多
The bigger this area, the more the required air volume

* 通風量根據日本空氣調和衛生學會定義的換氣率標準計算。The ventilating volume is calculated according to the standard of air change rates defined by The Society of Heating, Air Conditioning and Sanitary Engineers of Japan.

* 假設天花板高度 = 2.7m
Assumed height of ceiling = 2.7m

優質安全設計 減低意外機會 PREMIUM SAFETY DESIGN

為提高產品安全性，三菱電機推出全新阻燃物料設計。機身採用不易燃物料，減低發生意外的機會。

In order to enhance product safety, Mitsubishi Electric introduced a new flame retardant material design. The body of our exhaust fans is made of non-flammable materials, thus reducing the chance of accidents.

封閉式馬達 防火防塵 FIRE & DUST PROOF ENCLOSED MOTOR

高防火、防塵能力：三菱電機抽氣扇馬達採用封閉式設計，有助防止積聚塵埃，避免短路或馬達過熱，防火能力符合三菱電機社內嚴格標準。

FIRE AND DUST PROOF: The enclosed motor helps prevent the accumulation of dust, avoiding short circuit or motor overheating. Its fire resistance complies with Mitsubishi Electric's strict standards.

保險絲 — 自動斷電功能：內設過荷保險絲及溫度保險絲，當發生短路或馬達過熱時，會自動切斷電源，進一步保障產品安全。

FUSE — AUTOMATIC POWER OFF: Thanks to the built-in overload fuse and temperature fuse, our exhaust fans will automatically cut off the power in case of short circuit or motor overheating to further enhance product safety.

一按式扇葉拆卸 方便清洗 CONVENIENT BLADE DISASSEMBLY

只需輕按扇葉中央側旁的按鈕，便可輕易把扇葉拆下，方便清洗。(*適用於掛牆式各型號、電動背板型各型號及 V-20SL7T)

The blades are easy to disassemble by simply pressing one button. (*Applicable to all wall mount models, all electric shutter type models and V-20SL7T)

抽氣扇 EXHAUST FAN

封閉式馬達 節省電力 ENCLOSED MOTOR SAVES MORE ELECTRICITY

全新掛牆式系列抽氣扇採用封閉式馬達，在節省能源方面表現更佳。

The new wall mount series is equipped with an enclosed motor which performs even better in energy saving.

新扇葉設計—超級風翼扇 — EXTRA WINGLET FAN



配備「超級風翼扇」，有助提升抽氣效能。
* 適用於掛牆式各型號及 V-15EWG6T

The Extra Winglet Fan helps improve exhaust efficiency.
* Applicable to all wall mount models and V-15EWG6T



掛牆式(標準型) WALL MOUNT (STANDARD TYPE)

EX-20SHC7T EX-25SHC7T EX-30SHC7T

■ 適用於商舖、辦公室、客廳及廚房
Suitable for shop, office, living room and kitchen

■ 採用 5 扇葉設計的「超級風翼扇」
5-blade Extra Winglet Fan

■ 封閉式馬達，防火防塵
Enclosed motor which is fire and dust proof

■ 特設盛油器，容易清潔；扇葉容易拆卸，方便清洗
Extra oil trap and convenient blade disassembly for easy cleaning

■ 配合「隨易裝」設計*，使安裝增添靈活，更加隨心所欲
"Easy to install" design makes installation more flexible

■ 符合防水等級標準IPX4 (室外)
Comply with waterproof standard IPX4 (outdoor)

窗口式(標準型) WINDOW MOUNT (STANDARD TYPE)

V-15SL6T V-20SL7T

■ 適用於商舖、辦公室、客廳及廚房
Suitable for shop, office, living room and kitchen

■ 封閉式馬達，防火防塵
Enclosed motor which is fire and dust proof

■ 纖巧設計，容易清潔
Slim design for easy cleaning


■ 配合「隨易裝」設計*，使安裝增添靈活，更加隨心所欲
"Easy to install" design makes installation more flexible

■ 符合防水等級標準IPX4 (室外)
Comply with waterproof standard IPX4 (outdoor)

*「隨易裝」設計指機內設有接線盒及電源外接端子。安裝時，可隨不同環境而決定使用原機插頭或接駁電源線。請安排合資格技師並根據說明書進行安裝。
* "Easy to install" design means the device is inbuilt with a junction box and power supply terminal. During installation, it can be chosen to either use the original power plug or connect the power cord wires depending on different circumstances. Please arrange a qualified technician and follow the instructions to install.




安裝尺寸 DIMENSION (毫米 mm)

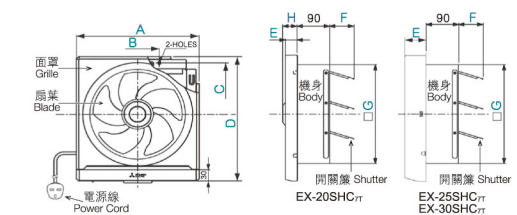

型號	A	B	C	D	E	F	G	H
EX-20SHC7T	296	120	265	320	36	40	240	50
EX-25SHC7T	346	170	315	362	50	57	290	-
EX-30SHC7T	396	220	365	412	65	70	340	-




安裝尺寸 DIMENSION (毫米 mm)

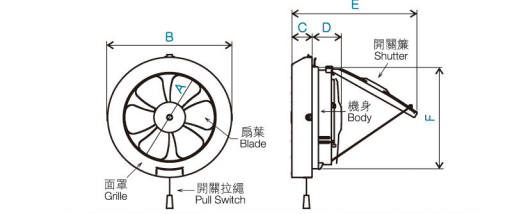

型號	A	B	C	D	E	F	G	H
V-15SL6T	150	210	43	53	206	178		
V-20SL7T	200	276	45	63	300	237		




安裝尺寸 DIMENSION (毫米 mm)

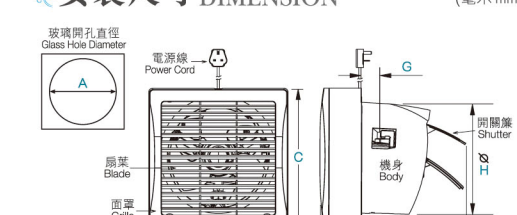

型號	A	B	C	D	E	F	G	H
V-15EWG6T	184-188	229	229	73	106	57	3-25	182



安裝尺寸 DIMENSION (毫米 mm)

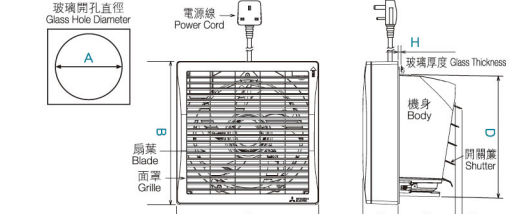

型號	A	B	C	D	E	F	G	H
V-20EWG7T	247-250	287	285	245	70.5	115	13	3-7

*「隨易裝」設計指機內設有接線盒及電源外接端子。安裝時，可隨不同環境而決定使用原機插頭或接駁電源線。請安排合資格技師並根據說明書進行安裝。
* "Easy to install" design means the device is inbuilt with a junction box and power supply terminal. During installation, it can be chosen to either use the original power plug or connect the power cord wires depending on different circumstances. Please arrange a qualified technician and follow the instructions to install.

窗口式(電動背板型) WINDOW MOUNT (ELECTRIC SHUTTER TYPE)

V-15EWG6T

■ 適用於商舖、辦公室、客廳及廚房
Suitable for shop, office, living room and kitchen

■ 「超級風翼扇」扇葉設計
Extra Winglet Fan blade design

■ 封閉式馬達，防火防塵
Enclosed motor which is fire and dust proof

■ 前置面罩，安全美觀
Safe and beautiful front grille

■ 電動背板設計，惡劣天氣下仍能如常運作
Electric shutter can operate as usual under bad weather

■ 配合「隨易裝」設計*，使安裝增添靈活，更加隨心所欲
"Easy to install" design makes installation more flexible

■ 符合防水等級標準IPX4 (室外)
Comply with waterproof standard IPX4 (outdoor)

V-20EWG7T

■ 適用於商舖、辦公室、客廳及廚房
Suitable for shop, office, living room and kitchen

■ 封閉式馬達，防火防塵
Enclosed motor which is fire and dust proof

■ 前置面罩，安全美觀
Safe and beautiful front grille

■ 電動背板設計，惡劣天氣下仍能如常運作
Electric shutter can operate as usual under bad weather

■ 配合「隨易裝」設計*，使安裝增添靈活，更加隨心所欲
"Easy to install" design makes installation more flexible

■ 符合防水等級標準IPX4 (室外)
Comply with waterproof standard IPX4 (outdoor)

*「隨易裝」設計指機內設有接線盒及電源外接端子。安裝時，可隨不同環境而決定使用原機插頭或接駁電源線。請安排合資格技師並根據說明書進行安裝。
* "Easy to install" design means the device is inbuilt with a junction box and power supply terminal. During installation, it can be chosen to either use the original power plug or connect the power cord wires depending on different circumstances. Please arrange a qualified technician and follow the instructions to install.

掛牆式(網罩型) WALL MOUNT (LOUVER TYPE)

EX-20SKC7T EX-25SKC7T

■ 適用於商舖、辦公室、客廳及廚房
Suitable for shop, office, living room and kitchen

■ 採用 5 扇葉設計的「超級風翼扇」
5-blade Extra Winglet Fan

■ 封閉式馬達，防火防塵
Enclosed motor which is fire and dust proof

■ 前置面罩，安全美觀
Safe and beautiful front grille

■ 配合「隨易裝」設計*，使安裝增添靈活，更加隨心所欲
"Easy to install" design makes installation more flexible

■ 符合防水等級標準IPX4 (室外)
Comply with waterproof standard IPX4 (outdoor)

*「隨易裝」設計指機內設有接線盒及電源外接端子。安裝時，可隨不同環境而決定使用原機插頭或接駁電源線。請安排合資格技師並根據說明書進行安裝。
* "Easy to install" design means the device is inbuilt with a junction box and power supply terminal. During installation, it can be chosen to either use the original power plug or connect the power cord wires depending on different circumstances. Please arrange a qualified technician and follow the instructions to install.

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290

型號	A	B	C	D	E	F	G
EX-20SKC7T	296	120	265	296	64	40	240
EX-25SKC7T	346	170	315	346	60	57	290



安裝尺寸 DIMENSION (毫米 mm)



Diagram illustrating the connection of the power cord and shutter control. The left part shows the power cord (電源線 Power Cord) connected to the unit. The right part shows the shutter control (開關 Shutter) connected to the unit. Labels include Blade, Body, and Shutter.

產品規格 SPECIFICATIONS

掛牆式(標準型) WALL MOUNT (STANDARD TYPE) 抽氣扇 EXHAUST FAN

型號 Model	EX-20SHC _{T7}	EX-25SHC _{T7}	EX-30SHC _{T7}
電源輸入 Power Supply (V/Hz)	220 / 50	220 / 50	220 / 50
扇葉直徑 Blade Diameter (cm/inch)	20 / 8	25 / 10	30 / 12
電流 Electric Current (A) *	0.10	0.12	0.15
耗電量 Power Consumption (W) *	19.0	25.0	32.0
轉速 Rotation Speed (RPM)	1,330	1,180	900
風量 Air Volume (CMH) *	580	950	1,170
風量 Air Volume (CFH) *	20,483	33,540	41,318
噪音 Noise Level (dB) *	39	40	37
重量 Weight (kg)	2.2	2.5	2.9

窗式(標準型) WINDOW MOUNT (STANDARD TYPE)

型號 Model	V-15SL6T	V-20SL7T
電源輸入 Power Supply (V/Hz)	220 / 50	220 / 50
扇葉直徑 Blade Diameter (cm/inch)	15 / 6	20 / 8
電流 Electric Current (A) *	0.04	0.065
耗電量 Power Consumption (W) *	8.0	13.0
轉速 Rotation Speed (RPM)	1,550	1,280
風量 Air Volume (CMH) *	230	390
風量 Air Volume (CFH) *	8,122	13,772
噪音 Noise Level (dB) *	39	39
重量 Weight (kg)	1.1	1.2

窗式(電動背板型) WINDOW MOUNT (ELECTRIC SHUTTER TYPE)

型號 Model	V-15EW6T	V-20EW6T
電源輸入 Power Supply (V/Hz)	220 / 50	220 / 50
扇葉直徑 Blade Diameter (cm/inch)	15 / 6	20 / 8
電流 Electric Current (A) *	0.070	0.09
耗電量 Power Consumption (W) *	14.5	18.0
轉速 Rotation Speed (RPM)	1,840	1,290
風量 Air Volume (CMH) *	270	460
風量 Air Volume (CFH) *	9,534	16,244
噪音 Noise Level (dB) *	42.5	40
重量 Weight (kg)	1.8	2.6

掛牆式(網罩型) WALL MOUNT (LOUVER TYPE)

型號 Model	EX-20SKC _{T7} (灰色 BW / 白色 WH)	EX-25SKC _{T7} (灰色 BW / 白色 WH)
電源輸入 Power Supply (V/Hz)	220 / 50	220 / 50
扇葉直徑 Blade Diameter (cm/inch)	20 / 8	25 / 10
電流 Electric Current (A) *	0.10	0.12
耗電量 Power Consumption (W) *	19	26
轉速 Rotation Speed (RPM)	1,350	1,160
風量 Air Volume (CMH) *	550	900
風量 Air Volume (CFH) *	19,423	31,783
噪音 Noise Level (dB) *	39	42
重量 Weight (kg)	2.3	2.7

■ 符合國際安全標準 IEC60335-2-80、IEC60335-1 及 IEC62233
Comply with international safety standards IEC60335-2-80, IEC60335-1 and IEC62233

* 電流和耗電量是根據 IEC 60335-1 及 IEC 60335-2-80 標準量度。
Data of electric current and power consumption are measured based on IEC 60335-1 and IEC 60335-2-80 standards

產品規格 SPECIFICATIONS

標準型 STANDARD TYPE 導管式通風扇 DUCT VENTILATOR

型號 Model	VD-10Z4T6	VD-15Z4T7	VD-15ZP4T7
電源輸入 Power Supply (V/Hz)	220 / 50	220 / 50	220 / 50
格柵尺寸 Grille Size (mm)	250 x 250	330 x 330	330 x 330
電流 Electric Current (A) *	0.05	0.06	0.08
耗電量 Power Consumption (W) *	9	12	17
轉速 Rotation Speed (RPM)	900	670	870
風量 Air Volume (CMH) *	100	157	217
風量 Air Volume (CFH) *	3,540	5,520	7,680
噪音 Noise Level (dB) *	29	28	35
管道尺寸 Pipe Joint Dimension (mm) *	105	105	105
重量 Weight (kg)	2.2	3.4	3.4

金屬型 METAL TYPE

型號 Model	VD-18Z _{4T7}	VD-20Z _{4T7}
電源輸入 Power Supply (V/Hz)	220 / 50	220 / 50
格柵尺寸 Grille Size (mm)	334 x 334	380 x 380
電流 Electric Current (A) *	0.15	0.20
耗電量 Power Consumption (W) *	34	42
轉速 Rotation Speed (RPM)	600	730
風量 Air Volume (CMH) *	335	440
風量 Air Volume (CFH) *	11,820	15,540
噪音 Noise Level (dB) *	35	39
管道尺寸 Pipe Joint Dimension (mm) *	160	160
重量 Weight (kg)	5.8	6.5

金屬型 METAL TYPE

型號 Model	VD-20Z _{4T5}			VD-23Z _{4T5}			VD-23Z _{4T5}		
	高 High	低 Low	低 Low	高 High	低 Low	低 Low	高 High	低 Low	低 Low
電源輸入 Power Supply (V/Hz)	220 / 50	220 / 50	220 / 50	220 / 50	220 / 50	220 / 50	220 / 50	220 / 50	220 / 50
格柵尺寸 Grille Size (mm)	380 x 380	380 x 380	380 x 380	474 x 474	474 x 474	474 x 474	474 x 474	474 x 474	474 x 474
電流 Electric Current (A) *	0.26	0.16	0.16	0.35	0.16	0.16	0.43	0.26	0.26
耗電量 Power Consumption (W) *	53	37	37	75	37	37	95	59	59
轉速 Rotation Speed (RPM)	840	610	650	440	930	930	600	600	600
風量 Air Volume (CMH) *	510	370	580	360	715	450	450	450	450
風量 Air Volume (CFH) *	18,010	13,066	20,482	12,713	25,250	15,892	15,892	15,892	15,892
噪音 Noise Level (dB) *	43	37	46	35	48	39	48	39	39
管道尺寸 Pipe Joint Dimension (mm) *	160	160	160	160	160	160	160	160	160
重量 Weight (kg)	7.4	8.6	9.7	8.6	9.7	9.7	9.7	9.7	9.7

* 風量和噪音是根據 JIS C 9603 標準量度。
Data of air volume and noise level are measured based on JIS C 9603 standard

由於印刷關係，產品顏色可能與實物略有不同
Printed color may be slightly different from that of actual products

產品資料由廠方提供
Product information is provided by the manufacturer

設計和規格如有更改，恕不另行通知
Designs and specifications are subject to change without prior notice

導管式通風扇 DUCT VENTILATOR

新改良設計 IMPROVED DESIGN

VD 系列的格柵設計精巧，能協調不同場所的環境。格柵尺寸加大，配合改進了強度和形狀的彈簧裝置，令格柵能更緊貼在天花板上。

The grille design of VD Series has been improved to suit for various premises. The grilles are enlarged in size and the spring device is enhanced in strength and shape, so that the grilles can be fixed firmly and closely to the ceiling.

功能完善 ENHANCED PERFORMANCE

- 複式葉窗移動平穩，能減少使用造成的損耗
Dual shutters move more smoothly, reducing deterioration with use
- 機身採用了斂鍵技術，使結構更密閉，從而減少空氣泄漏，並增強了機體耐腐蝕性
Use of caulking on body has resulted in a more airtight construction, which reduces air leakage and enhances corrosion resistance

安裝簡易 EASY INSTALLATION

適用於輕量鋼架天花板
Suitable for Lightweight Steel Frame Ceilings

複合納米防污塗層 (風扇扇頁) DUAL BARRIER COATING (Centrifugal Fan)

適用型號 Applicable Models: VD-10Z4T6, VD-15Z4T7, VD-15ZP4T7

複合納米防污塗層 (風扇扇頁) DUAL BARRIER COATING (Centrifugal Fan)

適用型號 Applicable Models: VD-10Z4T6, VD-15Z4T7, VD-15ZP4T7

複合納米防污塗層 (風扇扇頁) DUAL BARRIER COATING (Centrifugal Fan)

適用型號 Applicable Models: VD-10Z4T6, VD-15Z4T7, VD-15ZP4T7

複合納米防污塗層 (風扇扇頁) DUAL BARRIER COATING (Centrifugal Fan)

適用型號 Applicable Models: VD-10Z4T6, VD-15Z4T7, VD-15ZP4T7

複合納米防污塗層 (風扇扇頁) DUAL BARRIER COATING (Centrifugal Fan)

適用型號 Applicable Models: VD-10Z4T6, VD-15Z4T7, VD-15ZP4T7

複合納米防污塗層 (風扇扇頁) DUAL BARRIER COATING (Centrifugal Fan)

適用型號 Applicable Models: VD-10Z4T6, VD-15Z4T7, VD-15ZP4T7

複合納米防污塗層 (風扇扇頁) DUAL BARRIER COATING (Centrifugal Fan)

適用型號 Applicable Models: VD-10Z4T6, VD-15Z4T7, VD-15ZP4T7

標準型 STANDARD TYPE

VD-10Z4T6 VD-15Z4T7 VD-15ZP4T7

塑料格柵 PLASTIC GRILLE


適用於 Applicable to:

- 浴室 Bathroom
- 洗手間 Washroom

低噪音型 LOW NOISE TYPE

- 壓力式離心抽風機 Pressurized Centrifugal Fan
- 耐濕度塑料柵 Humidity-resistant plastic grille
- 設有防回流灰塵閥門 Equipped with back-draft shutter

安裝尺寸 DIMENSION (毫米 mm)

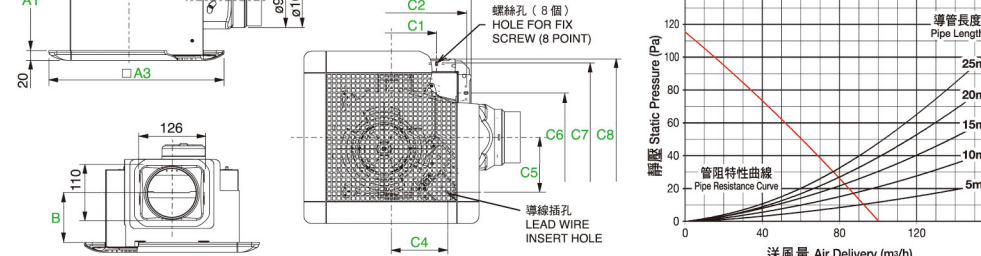

安裝尺寸 DIMENSION (毫米 mm)

型號 Model	A1	A2	A3	B	C1	C2	C3	C4	C5	C6	C7	C8
VD-10Z4T6	172	171	250	102	130	197	223	62.5	62.5	130	197	223
VD-15Z4T7	200	251	330	111	170	283	303	105	105	170	283	303
VD-15ZP4T7	200	251	330	111	170	283	303	105	105	170	283	303

產品規格 SPECIFICATION

型號 Model	格柵物料 Grille Type	格柵尺寸 Grille Size mm	風壓 Air Pressure Pa	風量# Air Volume CMH/CFM	耗電量* Power Consumption W	噪音# Noise Level dB	風管尺寸 Pipe Joint Dimension mm	重量 Weight kg	電源輸入 Power Supply V/Hz
VD-10Z4T6	塑料 Plastic	250x250	0	100 (59)	9	29	ø105	2.2	220/50
VD-15Z4T7	塑料 Plastic	330x330	0	157 (92)	12	28	ø105	3.4	220/50
VD-15ZP4T7	塑料 Plastic	330x330	0	217 (128)	17	32	ø105	3.4	220/50

* 耗電量是根據 IEC 60335-1 及 IEC 60335-2-80 標準量度。
The data of power consumption are measured based on the IEC 60335-1 and IEC 60335-2-80 standards.

風量和噪音是根據 JIS C 9603 標準量度。
The data of air volume and noise level are measured based on the JIS C 9603 standard.

金屬型 METAL TYPE

VD-18Z_{4T7} VD-20Z_{4T7}

金屬格柵 METAL GRILLE


適用於 Applicable to:

- 客廳 Living Room
- 辦公室 Office
- 店舖 Store
- 廚房 Kitchen

高流量型 HIGH AIRFLOW TYPE

- 壓力式離心抽風機 Pressurized Centrifugal Fan
- 設有風速調節器 Use of slide cover to adjust airflow speed

安裝尺寸 DIMENSION (毫米 mm)

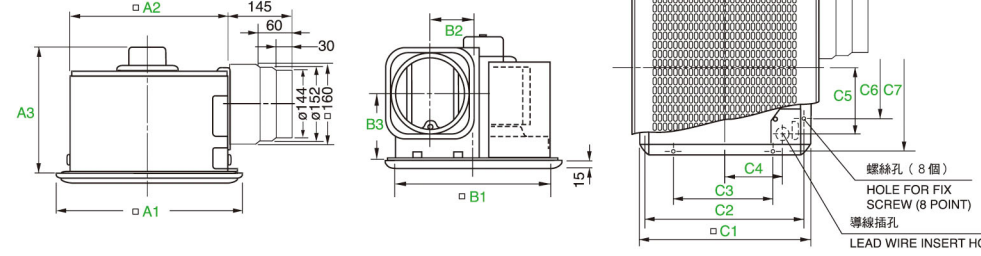

安裝尺寸 DIMENSION (毫米 mm)

型號 Model	A1	A2	A3	B1	B2	B3	C1	C2	C3	C4	C5	C6	C7
VD-18Z _{4T7}	334	270	243	276	67	135	308	292	230	99.5	111.5	230	292
VD-20Z _{4T7}	380	307	243	313	85.5	135	345	332	200	118	130	200	332

產品規格 SPECIFICATION

型號 Model	格柵物料 Grille Type	格柵尺寸 Grille Size mm	風壓 Air Pressure Pa	風量# Air Volume CMH/CFM	耗電量* Power Consumption W	噪音# Noise Level dB	風管尺寸 Pipe Joint Dimension mm	重量 Weight kg	電源輸入 Power Supply V/Hz
VD-18Z _{4T7}	金屬 Metal	334x334	0	335 (197)	31	35	ø160	5.8	220/50
VD-20Z _{4T7}	金屬 Metal	380x380	0	430 (253)	42	39	ø160	6.5	220/50

* 耗電量是根據 IEC 60335-1 及 IEC 60335-2-80 標準量度。
The data of power consumption are measured based on the IEC 60335-1 and IEC 60335-2-80 standards.

風量和噪音是根據 JIS C 9603 標準量度。
The data of air volume and noise level are measured based on the JIS C 9603 standard.

金屬型 METAL TYPE

VD-20Z_{4T5} VD-23Z_{4T5} VD-23Z_{4T5}

金屬格柵 METAL GRILLE


適用於 Applicable to:

- 客廳 Living Room
- 辦公室 Office
- 店舖 Store
- 廚房 Kitchen

高流量型 HIGH AIRFLOW TYPE

- 壓力式離心抽風機 Pressurized Centrifugal Fan
- 設有風速調節器 Use of slide cover to adjust airflow speed

安裝尺寸 DIMENSION (毫米 mm)

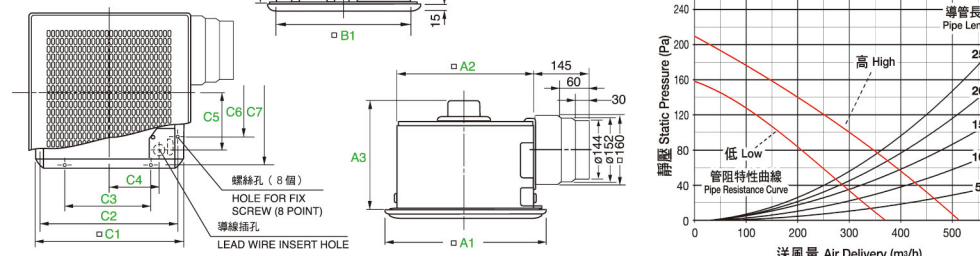

安裝尺寸 DIMENSION (毫米 mm)

型號 Model	A1	A2	A3	B1	B2	B3	C1	C2	C3	C4	C5	C6	C7
VD-20Z _{4T5}	380	307	243	313	85.5	135	345	332	200	118	130	200	332
VD-23Z _{4T5}	474	386	232	392	110.5	135	424	410	300	157.5	169.5	300	410
VD-23Z _{4T5}	474	386	278	392	110.5	161.5	438	410	300	157.5	169.5	300	410

產品規格 SPECIFICATION

型號 Model	格柵物料 Grille Type	格柵尺寸 Grille Size mm	風壓 Air Pressure Pa	風量# Air Volume CMH/CFM	耗電量* Power Consumption W	噪音# Noise Level dB	風管 尺寸 Pipe Joint Dimension mm	重量 Weight kg	電源 輸入 Power Supply V/Hz			
VD-20Z _{4T5}	金屬 Metal	380x380	510 (300)	370 (218)	53	37	43	37	7.4			
VD-23Z _{4T5}	金屬 Metal	474x474	0	580 (341)	360 (212)	75	37	46	35	ø160	8.6	220/50
VD-23Z _{4T5}	金屬 Metal	474x474	715 (421)	450 (265)	95	59	48	39	9.7	220/50		

VD-23Z_{4T5}

電源輸入 AC 220V

管場長度
Pipe Length

高 High

低 Low

靜水壓力 (Pa)
Static Pressure (Pa)

* 耗電量是根據 IEC 60335-1 及 IEC 60335-2-80 標準量度。
The data of power consumption are measured based on the IEC 60335-1 and IEC 60335-2-80 standards.

風量和噪音是根據 JIS C 9603 標準量度。
The data of air volume and noise level are measured based on the JIS C 9603 standard.